


1100 PROFILE

1000 Series



Cross-section dimensions:



THE THINNEST OF THE 1000 SERIES

This profile is **the thinnest of the 1000 Series** being only 6 mm (0.236 inch) thick and 18.7 mm (0.736 inch) wide, and is compatible with most of our LED engines. Perfect for tight spots, it will be very discreet and will stand out.

FEATURES

- The most compact profile of the 1000 Series, only 6mm thick.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8 inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY



















Compatible with LED engines up to **14mm** wide.

















LINEAR WEIGHT

0.060 lbs/ft, 0.089 kg/m (without lens)

*Dot free only in certain configurations - contact your sales representatives for information



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 1100 - 1100 Profile, alu	 CL - Clear lens	 FL - Flat bracket	Custom length by sections of 2 to 240 inches (6m).
 1101 - 1100 Profile, black	 SP - Spread lens	 45 - 45° Corner bracket	
	 OX - Optiflex lens	 SW - Swivel bracket 180°	
	 OP - Opal lens	 Easy beam angle adjustment	
	 PR - Prime lens		
	 BK - Black lens		
	 OX3D - Square 3D, Optiflex	 3M - Mounting tape, double face	
	 OP3D - Square 3D, Opal	 NO - No mounting hardware	
	 SIL - Silens Serie 1000		
	 NO - No lens		
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none">  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)  WD1 - 2200-2700K 14W  WD3 - 2700-3500K 14W  TW1 - Tunable White 11W  TW2 - Tunable White 19W  RGB1 - RGB 14W  RGB2 - RGB 19W  RGBW1 - 3000K  RGBW2 - 3000K 4in1 	<ul style="list-style-type: none"> LP0 - 128 LM / 1.5W FT / 90+CRI LP1 - 160 LM / 1.5W FT / 90+CRI LP2 - 255 LM / 3.0W FT / 90+CRI LP3 - 308 LM / 4.5W FT / 90+CRI LP4 - 400 LM / 5.8W FT / 90+CRI LHP - 700 LM / 7.0W FT / 95+CRI <p>Note: Not applicable for Warmdim (WD), Tunable White (TW) & RGB color temperatures</p>	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> 
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

CORNER ASSEMBLY OPTIONS




ADDITIONAL COMMENTS

When ordering an assembly that requires corners, make sure to indicate the correct corner type. In order to do this, please specify the desired lighting layout using the form below.




DOWN LIGHT

SIDE EXTERIOR




SIDE INTERIOR

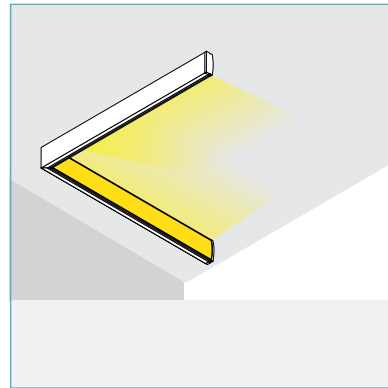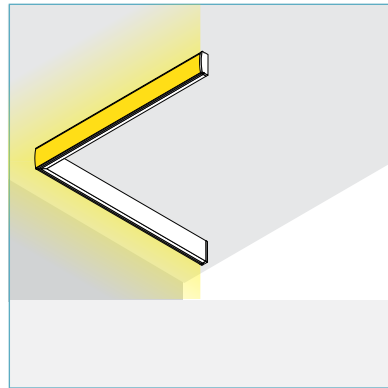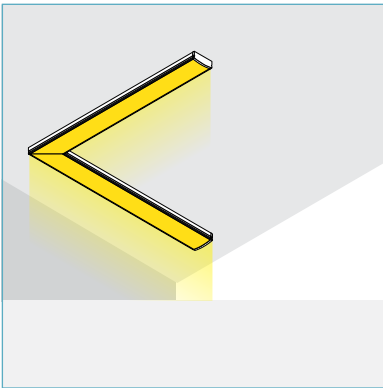

L-SHAPE

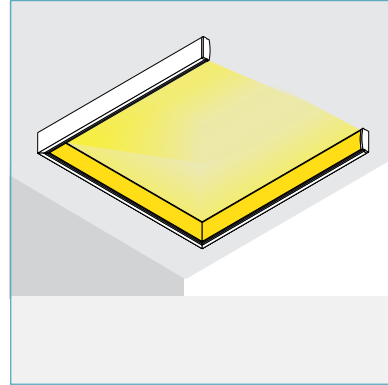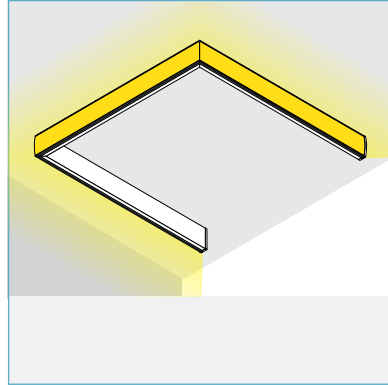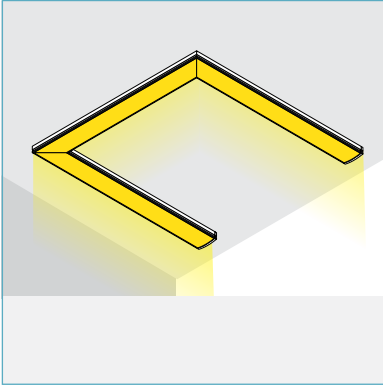

U-SHAPE

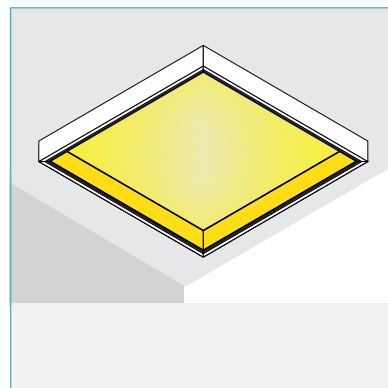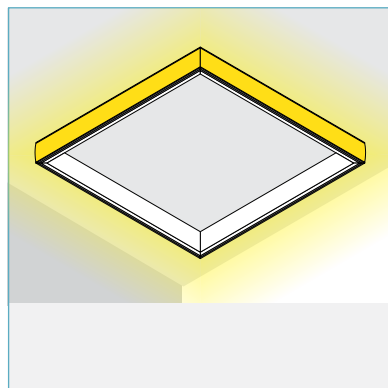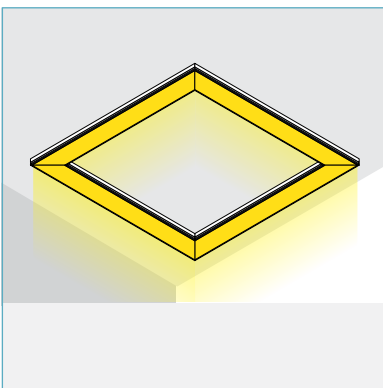


RECTANGLE




ASSEMBLY DIMENSION / DIMENSION D'ASSEMBLAGE

With standard lens / Avec lentille standard

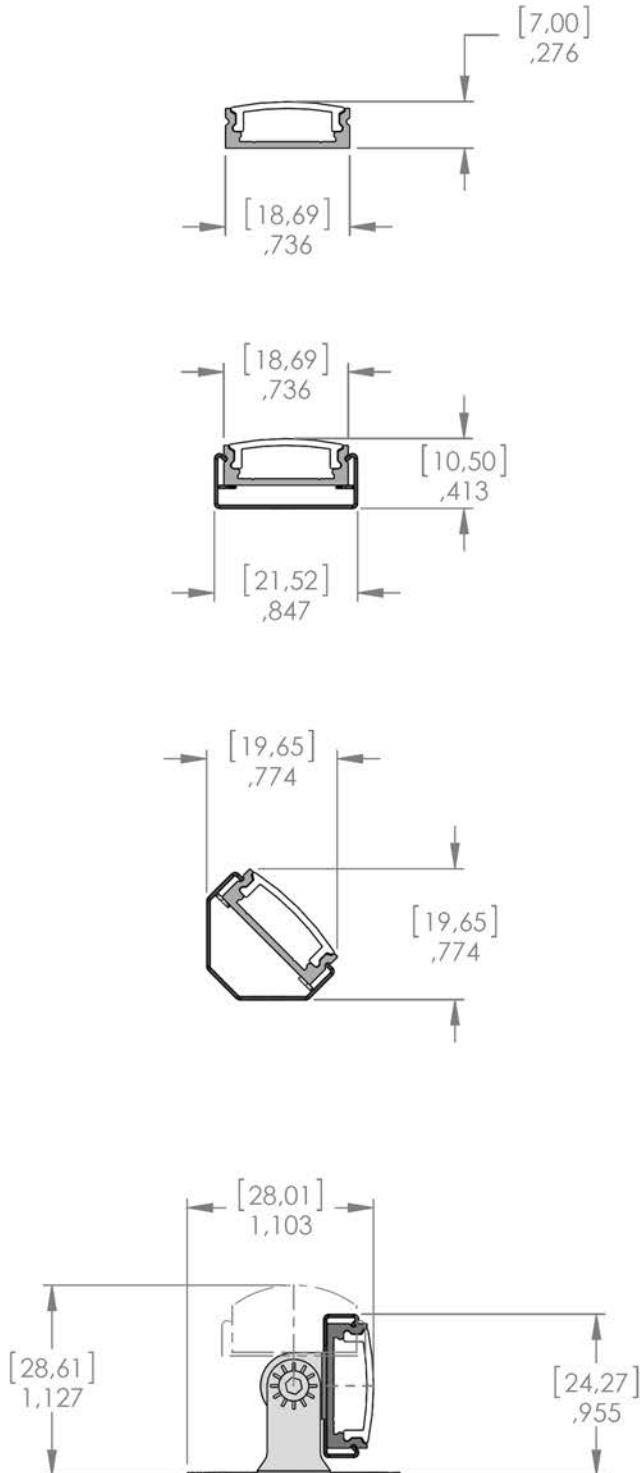

With focus lens / Avec lentille focus

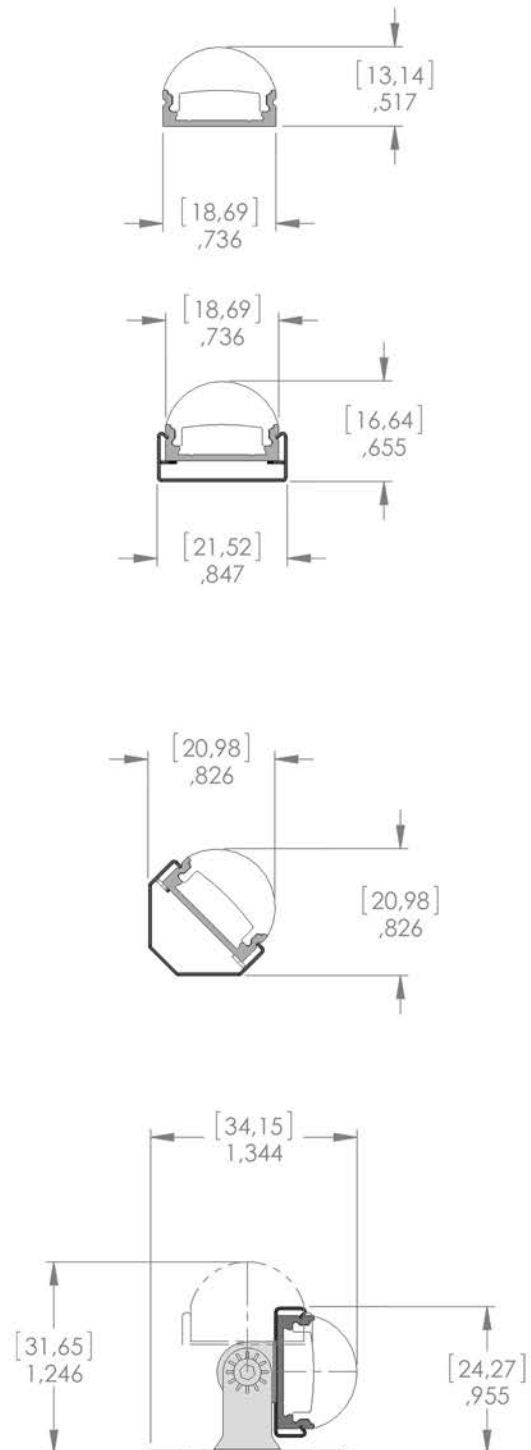

mm
inches/pouces