


1460 PRO OPTILUX

1000 Series



Cross-section dimensions:



The 1460 Optilux luminaire gives you full control whether you want to focus lighting on work surfaces or achieve indirect lighting with a wall-washing effect. With its customized options, you have carte blanche: choice of beam angles for uniform or asymmetrical lighting, and a collection of trendy colors. Designed for indoor use with multiple installations, it is ideal for office, boutique and hotel applications or to enhance wall lighting.

A high-tech gem: What makes the 1460 Optilux luminaire so innovative? Its lens incorporates an LED light source with a CRI of 95+, allowing you to direct the light exactly where you want it with exceptional quality and color rendition. Even better, its anti-reflective technology offers unparalleled visual comfort. Another innovation exclusive to LumenTruss™!

FEATURES

- Length of light source in 6.5 in (16 cm) increments only
- CRI 95+
- Choice of 4 color temperatures (2700 K, 3000 K, 3500 K et 4000 K)
- 2 beam angles: 30° × 30° (336 lm/ft) or 10° × 45° (345 lm/ft)
- Anti-reflective technology reducing eye fatigue
- 3 colors to choose from for the aluminum finish: black, white or satin gold
- Made of ALCOA 6063-T5 aluminum alloy for superior heat dissipation and increased LED light source life
- Surface or suspended installation
- Indoor use, 24 V


OPTIONS









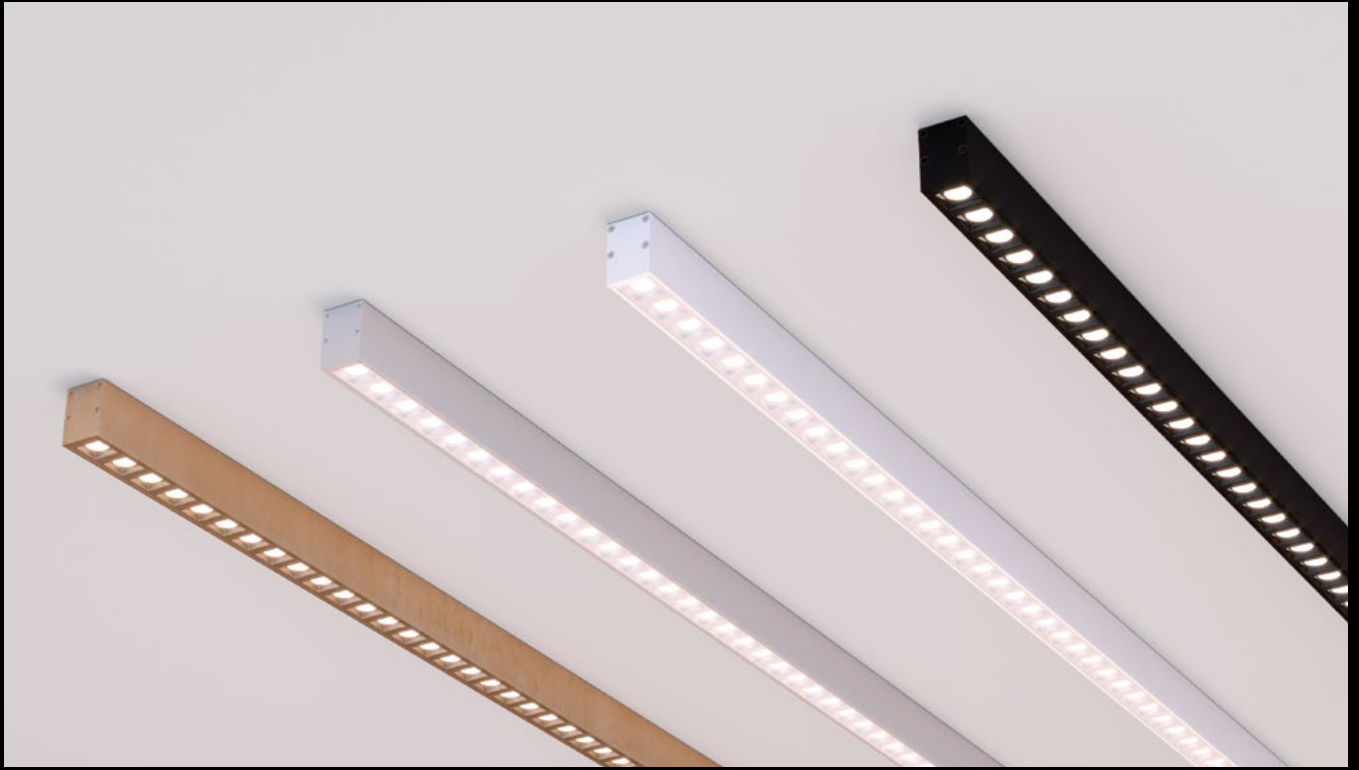


















LINEAR WEIGHT





0.23 lbs/ft, 0.35 kg/m (without lens or insert)








PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>1460 - Series 1400, alu</p>	 <p>OPT1 - Optilux Black</p>	 <p>PH - Phantom bracket</p>	<p>NOTE: Only available with SUS bracket (suspension)</p> 	<p>Choose prespecified length</p> <p>7 - 7.0625" 13 - 13.625" 20 - 20.1875" 26 - 26.75" 33 - 33.3125" 39 - 39.875" 46 - 46.4375" 53 - 53" 59 - 59.5625" 66 - 66.125" 72 - 72.6875" 79 - 79.25" 85 - 85.8125" 92 - 92.375"</p>
 <p>1461 - Series 1400, black</p>	 <p>OPT2 - Optilux white</p>	 <p>MG - Magnetic kit</p>	<p>Remote driver canopy plate See Appendix 2 on page 158 CR0 - Alu CR1 - Black CR2 - White</p> 	
 <p>1462 - Series 1400, white</p>	 <p>OPT3 - Optilux champagne</p>	 <p>WSB - Surface 2-side bracket</p>	<p>Integrated driver in canopy See Appendix 2 on page 158 CI0 - Alu CI1 - Black CI2 - White</p> 	
 <p>146X - Series 1400, custom color</p> <p>IMPORTANT: Give RAL color No See Appendix 1 on page 158</p>		 <p>SWS - Surface 1-side bracket</p>		
<p>RAL NUMBER</p>	 <p>Easy beam angle adjustment</p>	 <p>AWS - Surface 90° bracket</p>	<p>Integrated driver & suspension kit See Appendix 2 on page 158 CIK0 - Alu CIK1 - Black CIK2 - White</p> 	
		 <p>W45 - Surface 45° bracket</p>		
		 <p>SW - Swivel bracket 180°</p>		
		 <p>SUS - 1400 suspension kit</p>	<p>NO - No canopy</p> 	
		 <p>NO - No mounting hardware</p>		

COLOR TEMPERATURE	LUMEN PACKAGE/BEAM ANGLE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 27 - 2700K  30 - 3000K  35 - 3500K  42 - 4000K	<p>OP1 - 336 LM / 7.0W FT / 95+CRI 30x30 Smooth spot</p> <p>OP2 - 345 LM / 7.0W FT / 95+CRI 10x45 Asymmetric</p>	<p>HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT SUS - Coaxial wire 15 Ft NO - No lead</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4000K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> <div style="border: 1px solid black; padding: 2px; text-align: center;"> <p>TITLE 24 <small>1000</small></p> </div>
COLOR TEMPERATURE CCT	LUMEN PACKAGE/BEAM ANGLE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	


ASYMMETRICAL BRACKET TYPES:

When ordering ASSEMBLED option of the 1460 series with ASYMMETRICAL brackets, please specify the correct position of the brackets using the form below.


SWS
Surface 1-side bracket



AWS
Surface 90° bracket



W45
Surface 45° bracket



LAYOUT OPTIONS (DOWNLIGHT POSITION)

