



1540 PROFILE

1000 Series

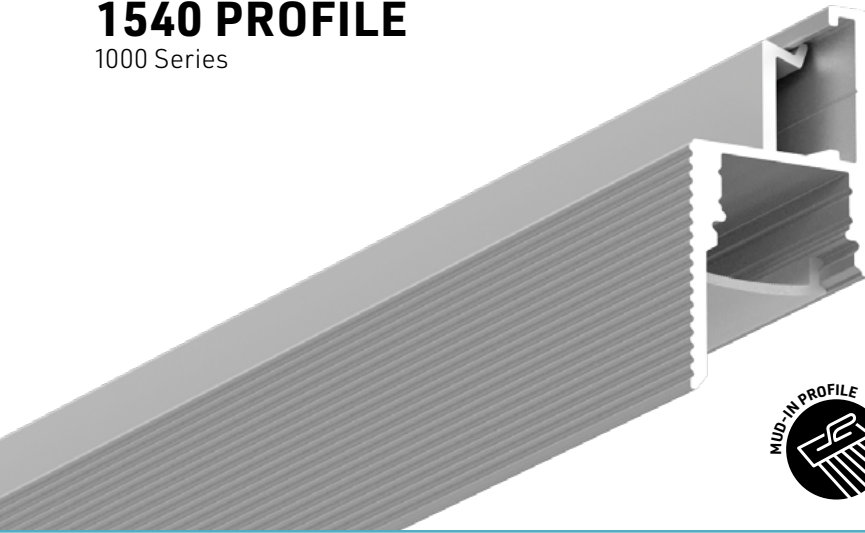

Cross-section dimensions:



A cove without a cove. Go beyond the traditional idea of a 6"x6" or 9"x9" box to create a cove light. The 1540 profile allows you to create a cove detail with only a depth of $\frac{3}{4}$ of an inch. This mud-in aluminum channel fits with both $\frac{5}{8}$ -inch and $\frac{1}{2}$ -inch drywall with the help of a simple clip that snaps into place. This lighting solution creates ceiling coves, wall coves, mid-wall applications, tray ceiling lighting, and highlights around and into corners.

FEATURES

- Ultra-compact aluminum profile
- Sections of 96 inches (8ft)
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation
- Snap-in clip to fit $\frac{1}{2}$ inch drywall

OPTIONS




LED TAPE COMPATIBILITY

Compatible with LED engines up to **14mm** wide.

LINEAR WEIGHT

0.217lbs/ft, 0.323kg/m (without lens)

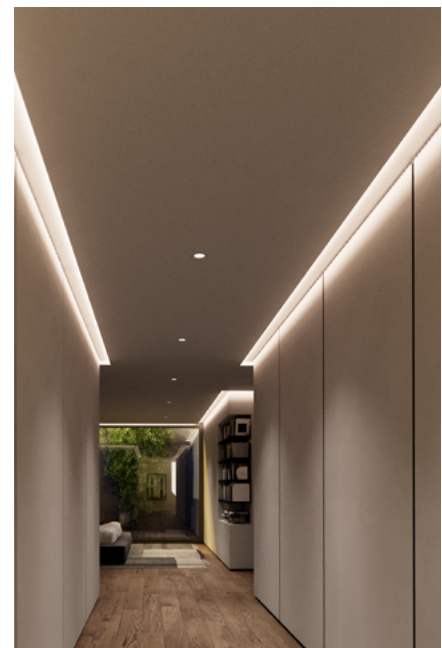

1540 Profile ordering sheet

1000 Series

PROFILE

1540 - 1540 Profile, 8'

CLIP

RC - Riser clip included for 1/2" drywall compatibility

0.17" 4.3mm
5/8"
0.27" 6.9mm
1/2"

LENSES

OX - Optiflex lens

PR - Prime lens

BK - Black lens

SIL - Silens Serie 1000

NO - No lens

LENGTH

Available in straight section of 8 feet (96 inches/2.4 m).
*Cut on site

ACCESSORIES

Drywall small head screw (x100)

1540 - **RC** - **96"** X

PROFILE - RISER CLIP - LENS - LENGTH - QTY - QUANTITY

LED engine will be assembled on site. See Appendix 3 on page 275 to see how to calculate total ordering length.

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN	USAGE	POWER SUPPLY/CONTROL	LENGTH
<ul style="list-style-type: none"> 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 53 - 5300K (LHP only) 62 - 6200K (LP only) 	<ul style="list-style-type: none"> LP0 - 119 LM / 1.5W FT / 90+CRI LP1 - 137 LM / 1.5W FT / 90+CRI LP2 - 234 LM / 3.0W FT / 90+CRI LP3 - 335 LM / 4.4W FT / 90+CRI LP4 - 488 LM / 5.8W FT / 90+CRI LHP - 668 LM / 7.0W FT / 95+CRI 	<ul style="list-style-type: none"> HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT NO - No lead 	<ul style="list-style-type: none"> I - IP22 indoor dry location 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver 	<p>Total length of LED engine in inches - See Appendix 3 (page 275) on how to calculate length.</p>
<ul style="list-style-type: none"> WD1 - 2200-2700K 14W WD3 - 2700-3500K 14W TW1 - Tunable White 11W TW2 - Tunable White 19W RGB1 - RGB 14W RGB2 - RGB 19W 	<p>Lumen Package selection is not available for WD, TW and RGB color options.</p>		<p>For TW or RGB strip options, select either A [Non-dimming] or E [Non-dimming DC plug] in power supply plus the J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</p>		
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN	USAGE	POWER SUPPLY/CONTROL	LED ENGINE LENGTH

*NOTE: The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver

TITLE 24