1690 PROFILE

1000 Series

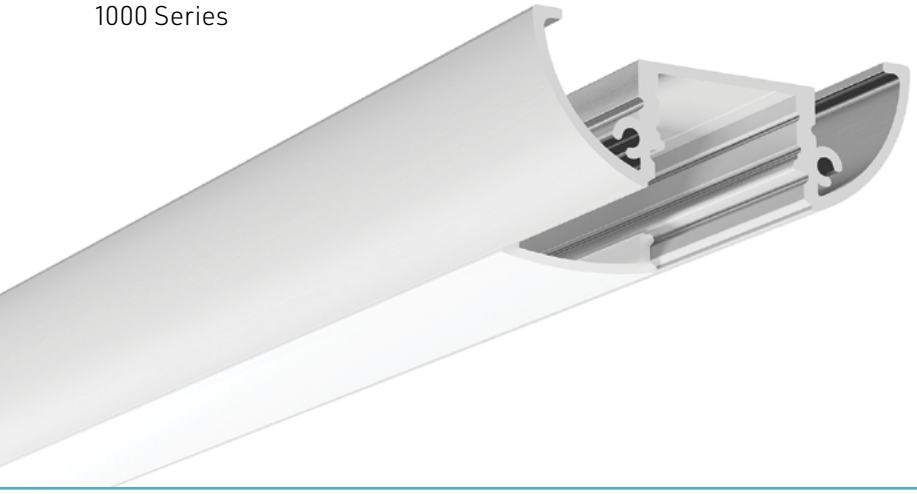

Cross-section dimensions:

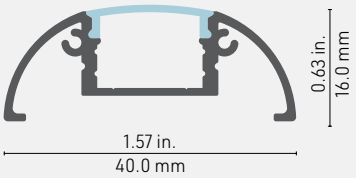

GREAT FOR UNDER CABINET LIGHTING

A rounded profile especially **designed to conceal mounting hardware and wires**, the 1690 can serve well for under cabinet lighting, or on any other surface as a mural fixture.

FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens*.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS

CUSTOM COLOR · IP68 WATERPROOF · DOT FREE

LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **14mm** wide.
IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.204 lbs/ft, 0.304 kg/m (without lens)

*Dot free only in certain configurations - contact your sales representatives for information

info@lumentruss.com / www.lumentruss.com / 1-855-384-3384
LumenTruss™. All rights reserved.

FICHE DECOMMANDE BLANC STATIQUE / WARM DIM

1690

1	2	3	4	5	6	7	8	9	10	11	12
Finish	Mounting	Optics	Lumen Package	CCT	Application	Power Feed	Input / Output	Exact / Optimal	Length, in	Driver Type	Accessories

1 PROFILE & FINISH

CA1690 - Anodized aluminum finish

CA169X - Custom color provide RAL #

2 MOUNTING

MCF - Flat surface bracket

M3M - Double face mounting tape

MNO - No mounting

3 OPTICS

DCS - Clear lens

DXS - Optiflex lens

DOS - Opal lens

DRS - Prime lens

DNO - No lens

4 LUMEN PACKAGE

LP100 - 1.5 W/ft - >130 lm/ft

LP200 - 2.9 W/ft - >200 lm/ft

LP300 - 4.4 W/ft - >300 lm/ft

LP450 - 5.8 W/ft - >450 lm/ft

PRECISE

LE150 - 1.5 W/ft - >150 lm/ft

LE300 - 3.0 W/ft - >300 lm/ft

NEAT

LT150† - 2.0 W/ft - >150 lm/ft

LT300† - 3.0 W/ft - >300 lm/ft

LW2229 - WARMDIM 2200-2900K - 4.4 W/ft - 192 lm/ft

LW2735 - WARMDIM 2700-3500K - 4.4 W/ft - 202 lm/ft

LWC2230 - WARMDIM COB 2200-3000K - 4.4 W/ft - 323 lm/ft

5 CCT

K24 - 2400K

K27 - 2700K

K30 - 3000K

K35 - 3500K

K40 - 4000K

K50 - 5000K

6 APPLICATION

AID - Indoor dry locations

AIW - Indoor wet locations

For wet location applications, LED strip will be put inside a waterproof silicone sheath.

† AIW option is not available for this selection

7 POWER FEED

FH3 - Hardwire, 3ft wire

FH6 - Hardwire, 6ft wire

FH9 - Hardwire, 9ft wire

FHX - Hardwire, custom length wire

FC3 - DC plug, 3ft wire

FC6 - DC plug, 6ft wire

FC9 - DC plug, 9ft wire

FCX - DC plug, custom length wire

8 INPUT / OUTPUT

WSE - Simple lead-in, end feed

WSB - Simple lead-in, back feed

WPE - Pass-through, end feed

WPB - Pass-through, back feed

9 EXACT/OPTIMAL

QE - Exact

QO - Optimal

Exact - length specified in section 10 with end caps without flanges.

Optimal - length specified in section 10, rounded down to the closest LED cut section to minimize dark spots.

10 LENGTH*

Length of the luminaire in inches.

**Includes end caps, excludes flanges (when applicable).*



length

11 DRIVER TYPE

PND - Non-dimmable

P010 - 0-10V dimming

PPH - Phase (ELV / MLV) dimming

P5i1 - 5-in-1 (Phase / 0-10V) dimming

PDAL - DALI compatible driver

PDMX - DMX driver

PNO - No driver

1690 series	alu. finish		prime lens	CCT 3500 K	hardwire connection, 6 '		72" fixture (with end caps)		non-dimmable driver
CA1690	- MCF	-	DRS - LE300	- K35	- AID	- FH6	- WSB	- QE72	PND
	flat bracket		Precise 3.0W/ft	indoor dry application		back feed lead-in only		exact length	

info@lumentruss.com / www.lumentruss.com / 1-855-384-3384

Lumentruss™. All rights reserved.

TUNABLE WHITE / RGB / RGBW ORDERING SHEET

1 Finish	2 Mounting	3 Optics	4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Exact / Optimal	10 Length, in	11 Driver Type	12 Accessories

1 PROFILE & FINISH

CA1690 - Anodized aluminum finish

CA169X - Custom color provide RAL #

2 MOUNTING

MCF - Flat surface bracket

M3M - Double face mounting tape

MNO - No mounting

3 OPTICS

DCS - Clear lens

DXS - Optiflex lens

DOS - Opal lens

DRS - Prime lens

DNO - No lens

4 LUMEN PACKAGE

LDWM2465 - Dual White - 3.5 W/ft - 260 lm/ft

LDWH2465 - Dual White - 5.8 W/ft - 427 lm/ft

LRGBLD - RGB - 4.4 W/ft - low density

LRGBMD - RGB - 5.8 W/ft - medium density

LRGB30† - RGBW (3000K) 4 in 1 - 4.4 W/ft - 107 lm/ft

5 CCT

2400-6500K

N/A

RGB + 3000K

6 APPLICATION

AID - Indoor dry locations

AIW - Indoor wet locations

For wet location applications, LED strip will be put inside a waterproof silicone sheath.

†AIW option is not available for this selection

7 POWER FEED

FH3 - Hardwire, 3ft wire

FH6 - Hardwire, 6ft wire

FH9 - Hardwire, 9ft wire

FHX - Hardwire, custom length wire

8 INPUT / OUTPUT

WSE - Simple lead-in, end feed

WSB - Simple lead-in, back feed

WPE - Pass-through, end feed

WPB - Pass-through, back feed

9 EXACT/OPTIMAL

QE - Exact

QO - Optimal

Exact - length specified in section 10 with end caps without flanges.

Optimal - length specified in section 10, rounded down to the closest LED cut section to minimize dark spots.

10 LENGTH*

Length of the luminaire in inches.

**Includes end caps, excludes flanges (when applicable).*



11 DRIVER TYPE / SENSOR

PND - Non-dimmable

PDMX - DMX driver

PNO - No driver

12 GYPSUM COVES, 8ft

CGAP - Apsis

CGLA - Latus

CGNI - Nidus

CGSU - Sulcus

1690 series	alu. finish		prime lens	2400-6500K		hardwire connection, 6 '		72" fixture (with end caps)		non-dimmable driver
CA1690	-	MCF	- DRS	- LDWH2465	-	AID	- FH6	- WSB	- QO72	PND
		flat bracket		dual white, high lumen		indoor dry application		back feed lead-in only		optimal length, no dark spots

info@lumentruss.com / www.lumentruss.com / 1-855-384-3384

Lumentruss™. All rights reserved.