



2000 PROFILE

2000 Series

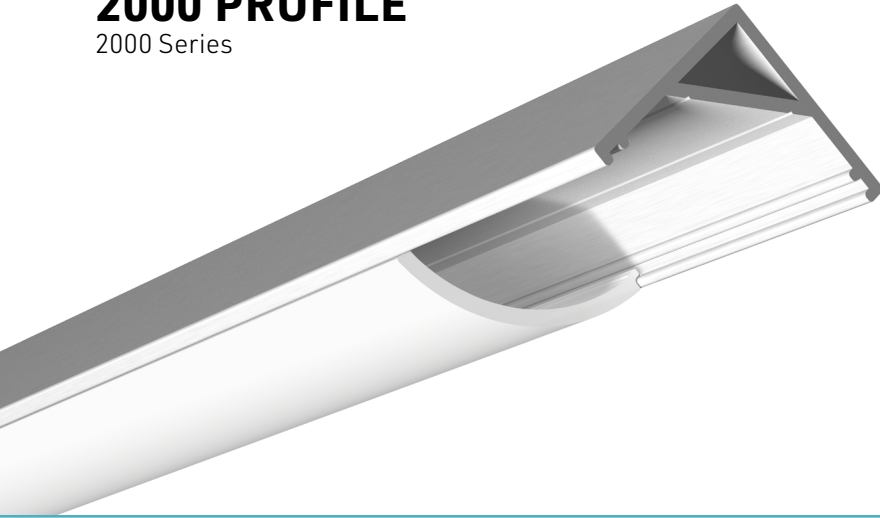

Cross-section dimensions:



WELL FOCUSED ON THE TASK!

Offering lighting without hot spots at a **45-degree** angle from a corner, the 2000 Series excels at maximizing appeal of the products in POP stands, while maintaining a minimalist style.

FEATURES

- Offers lighting with a beam oriented at 45 degrees.
- Designed to give a uniform light without hot spots with an opal or prime lens*.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.
- Conforms to UL STD. 2108 for closet usage.

OPTIONS



LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **14mm** wide.

IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.117 lbs/ft, 0.175 kg/m (without lens)

*Dot free only in certain configurations - contact your sales representatives for information









Boutique Exclusivity - Project Manager: Mark Design



info@lumentruss.com / www.lumentruss.com / 1-855-384-3384
LumenTruss™. All rights reserved.

2000 Profile ordering sheet

2000 Series

PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <p>2000 - 2000 Profile, alu</p>	 <p>OXR - Optiflex lens, round</p>  <p>OPR - Opal lens, round</p>  <p>PRR - Prime lens, round</p> <p>NO - No lens</p>	 <p>45 - 45° corner bracket</p>  <p>3M - Mounting tape, double face</p> <p>NO - No mounting hardware</p>	<p>Custom length by sections of 2 to 240 inches (6m).</p>

2000			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p> <p>WD1 - 2200-2700K14W/m</p> <p>WD3 - 2700-3500K14W/m</p> <p>COBWD - 2200-3200K14W/m</p> <p>TW1 - Tunable White 11W/m</p> <p>TW2 - Tunable White 19W/m</p> <p>RGB1 - RGB 14W/m</p> <p>RGB2 - RGB 19W/m</p> <p>RGBW2 - 3000K 4in114W/m</p>	<p>LP0 - 119 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 137 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 234 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 335 LM / 4.4W FT / 90+CRI</p> <p>LP4 - 488 LM / 5.8W FT / 90+CRI</p> <p>LHP - 668 LM / 7.0W FT / 95+CRI</p> <p>Lumen Package selection is not available for WD, TW and RGB color options.</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3** - DC plug 3 FT</p> <p>DC6** - DC plug 6 FT</p> <p>DC9** - DC plug 9 FT</p> <p>DCX** - DC plug custom FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>For TW or RGB strip options, select either A [Non-dimming] or E [Non-dimming DC plug] in power supply plus the J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277 VAC***</p> <p>D - 0/10V dimming 120/277 VAC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and transucency conversion factors.</p> <p>** Only available for static white and Warm Dim options</p> <p>*** Only available in 96W - 24V Driver.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN	LEAD OUT	USAGE	POWER SUPPLY/CONTROL