



2000 PROFILE

2000 Series

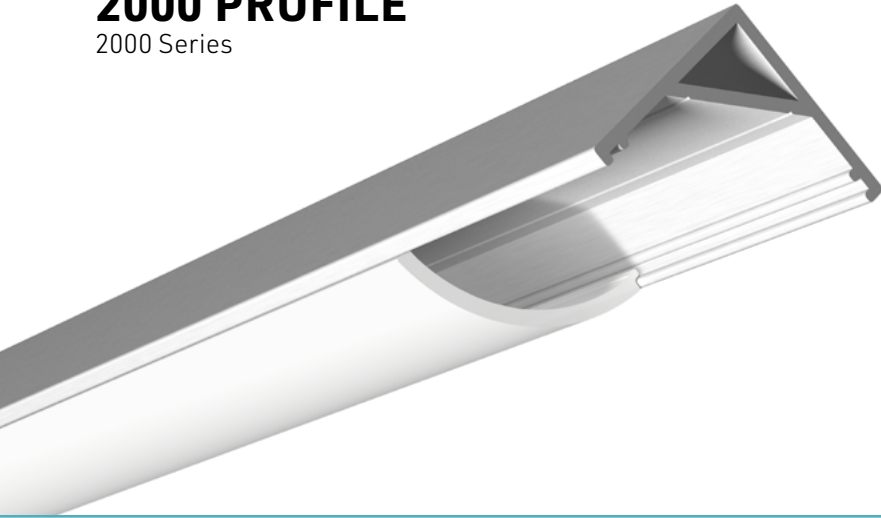

Cross-section dimensions:



WELL FOCUSED ON THE TASK!

Offering lighting without hot spots at a **45-degree** angle from a corner, the 2000 Series excels at maximizing appeal of the products in POP stands, while maintaining a minimalist style.

FEATURES

- Offers lighting with a beam oriented at 45 degrees.
- Designed to give a uniform light without hot spots with an opal or prime lens*.
- Custom length by sections of 2 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Designed to meet North American woodworking standards.
- Conforms to UL STD. 2108 for closet usage.

OPTIONS



LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **14mm** wide.

IP68: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.117 lbs/ft, 0.175 kg/m (without lens)

*Dot free only in certain configurations - contact your sales representatives for information



Boutique Exclusivity - Project Manager: Mark Design




CORNER ASSEMBLY OPTIONS


ADDITIONAL COMMENTS

When ordering an assembly that requires corners, make sure to indicate the correct corner type. In order to do this, please specify the desired lighting layout using the form below.


L-SHAPE

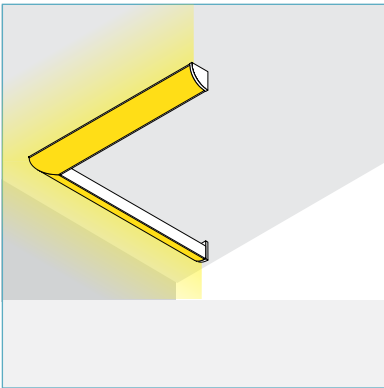




U-SHAPE

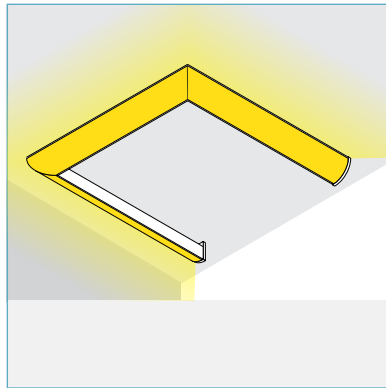

RECTANGLE

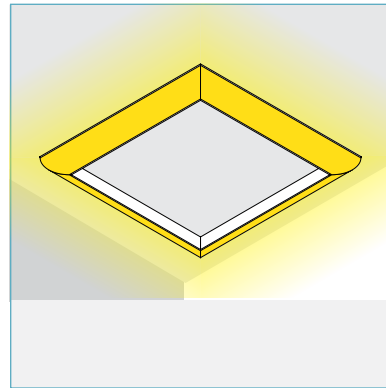




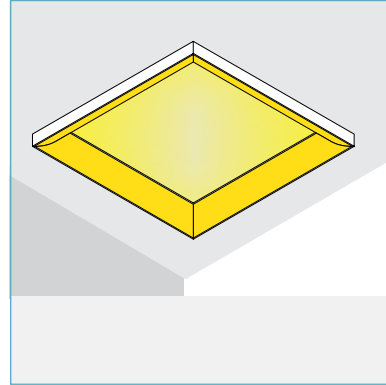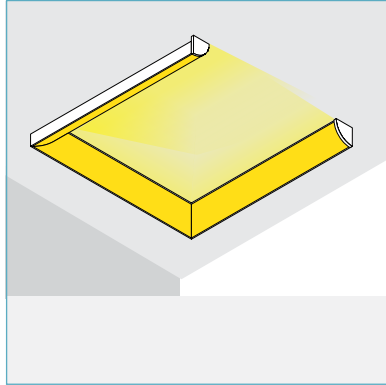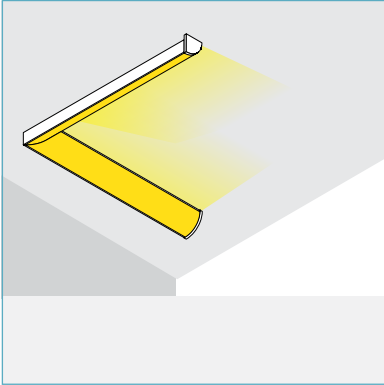





SIDE EXTERIOR

















SIDE INTERIOR



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 2000 - 2000 Profile, alu	 CLR - Clear lens, round	 45 - 45° corner bracket	Custom length by sections of 2 to 240 inches (6m).
	 OXR - Optiflex lens, round	 3M - Mounting tape, double face	
	 OPR - Opal lens, round	 NO - No mounting hardware	
	 PRR - Prime lens, round		
	 NO - No lens		

2000			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)	LP0 - 119 LM / 1.5W FT / 90+CRI LP1 - 137 LM / 1.5W FT / 90+CRI LP2 - 234 LM / 3.0W FT / 90+CRI LP3 - 335 LM / 4.4W FT / 90+CRI LP4 - 488 LM / 5.8W FT / 90+CRI LHP - 668 LM / 7.0W FT / 95+CRI	HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead	I - IP22 indoor dry location <div>For TW or RGB strip options, select either A [Non-dimming] or E [Non-dimming DC plug] in power supply plus the J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</div>	A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver	<p>*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver.</p>
 WD1 - 2200-2700K 14W  WD3 - 2700-3500K 14W  TW1 - Tunable White 11W  TW2 - Tunable White 19W  RGB1 - RGB 14W  RGB2 - RGB 19W  RGBW2 - 3000K 4in1	<div>Lumen Package selection is not available for WD, TW and RGB color options.</div>				
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN	LEAD OUT	USAGE	POWER SUPPLY/CONTROL