3200 PROFILE

3000 Series

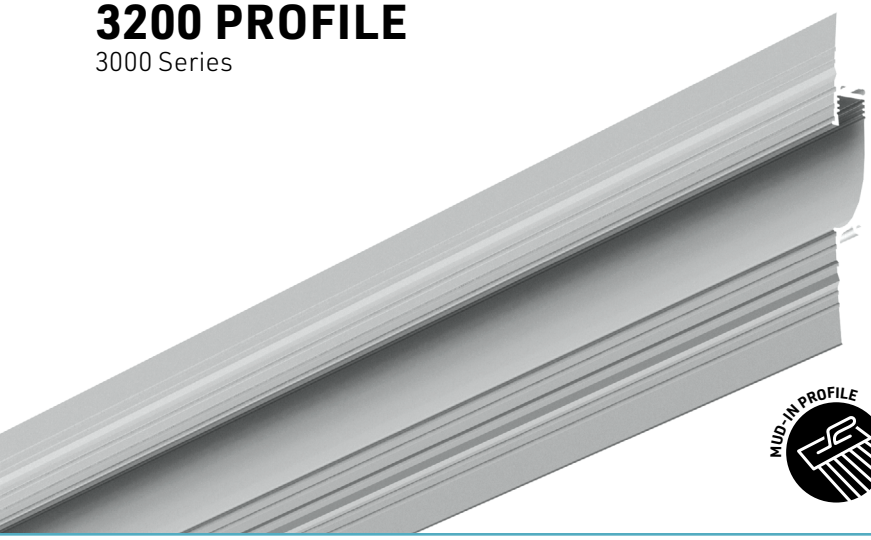

Cross-section dimensions:



E491159 · 6063-T5 ANODIZED ALUMINUM · 5 YEARS WARRANTY

With its smooth and curved inner surface, the new 3200 recessed profile allows indirect lighting with a hollow effect, regardless of the height at which it is installed. What's new? The possibility of adding endcaps for a neat and elegant finish. The 3200 is ideal for residential or commercial applications that require high efficiency, safe lighting.

FEATURES

- Direct adjustment with standard ½ inch gypsum panels and with 5/8 inch gypsum panels.
- Impeccable finish thanks to the grooves that allow the profile to be leveled to the wall surface using joint compound.
- Available in 96 inch (2.43 m) lengths for easy and accurate on-site installation. Optional endcaps, available.
- Equipped with a Prime lens for uniform illumination without light dots and optimal light diffusion.
- 8 mm LED light source: 4.8 W, 9.6 W, and 14.5 W, with 7 color temperatures (2400K to 5000K), IP22; also available in 10 mm width in 14.4 W-RGB.

OPTIONS

DOT FREE

LED ENGINE COMPATIBILITY

Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.330lbs/ft, 0.491kg/m (without lens)

info@lumentruss.com / www.lumentruss.com / 1-855-384-3384
LumenTruss™. All rights reserved.

ORDERING SHEET

3200

1 Finish	2 Optics	3 Quantity
CA3200	-	- 96" x

ACCESSORIES (OPTIONAL)	Quantity
JSO - Joiner straight (type A)	
JH135 - Joiner horizontal 135° (Type A)	
JH90 - Joiner horizontal 90° (Type A)	
Drywall small head screw x 100	
ECNL - Left end cap, alu.	
ECNR - Right end cap, alu	

1 FINISH

CA3200 - Anodized aluminum finish

2 OPTICS

DRS - Prime lens

DSS - Silicone lens

DNO - No lens

3 QUANTITY

This profile is shipped in straight sections of 96". Specify quantity of sections required.

STATIC WHITE / WARM DIM

4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Length, in	10 Driver Type
	-	- AID -		-	-	

4 LUMEN PACKAGE

LP100 - 1.5 W/ft - >130 lm/ft

LP200 - 2.9 W/ft - >200 lm/ft

LP300 - 4.4 W/ft - >300 lm/ft

LP450 - 5.8 W/ft - >450 lm/ft

PRECISE

LE150* - 1.5 W/ft - >150 lm/ft

LE300 - 3.0 W/ft - >300 lm/ft

NEAT

LT150* - 2.0 W/ft - >150 lm/ft

LT300 - 3.0 W/ft - >300 lm/ft

5 CCT

K24 - 2400K

K27 - 2700K

K30 - 3000K

K35 - 3500K

K40 - 4000K

K50 - 5000K (LP750 only)

6 APPLICATION

AID - Indoor dry locations

7 POWER FEED

FH3 - Hardwire, 3ft wire

FH6 - Hardwire, 6ft wire

FH9 - Hardwire, 9ft wire

FHX - Hardwire, custom length

8 INPUT / OUTPUT

WSE - Simple lead-in, end feed

WPE - Pass-through, end feed

9 LENGTH

Length in inches of the LED tape (will be adjusted according to the tape section cut increment).

10 DRIVER TYPE

PND - Non-dimmable

P010 - 0-10V dimming

PPH - Phase (ELV / MLV) dim.

P5i1 - 5in1 (Phase / 0-10V) dim.

PDAL - DALI compatible driver

PDMX - DMX driver

PNO - No driver

LW2229 - WARMDIM 2200-2900K - 4.4 W/ft - 192 lm/ft

LW2735 - WARMDIM 2700-3500K - 4.4 W/ft - 202 lm/ft

LWC2230 - WARMDIM COB 2200-3000K - 4.4 W/ft - 323 lm/ft

TUNABLE WHITE / RGB / RGBW

4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Length, in	10 Driver Type
-		- AID -		-	-	

4 LUMEN PACKAGE

LDWM2465 - Dual White - 3.5 W/ft - 260 lm/ft

LDWH2465 - Dual White - 5.8 W/ft - 427 lm/ft

LRGBLD - RGB - 4.4 W/ft - low density

LRGBMD - RGB - 5.8 W/ft - medium density

5 CCT

2400-6500K

N/A

6 APPLICATION

AID - Indoor dry locations

7 POWER FEED

FH3 - Hardwire, 3ft wire

FH6 - Hardwire, 6ft wire

FH9 - Hardwire, 9ft wire

FHX - Hardwire, custom length

8 INPUT / OUTPUT

WSE - Simple lead-in, end feed

WPE - Pass-through, end feed

9 LENGTH

Length in inches of the LED tape (will be adjusted according to the tape section cut increment).

10 DRIVER TYPE

PND - Non-dimmable

PDMX - DMX driver

PNO - No driver

info@lumentruss.com / www.lumentruss.com / 1-855-384-3384

Lumentruss™. All rights reserved.