



4250 PROFILE

4000 Series

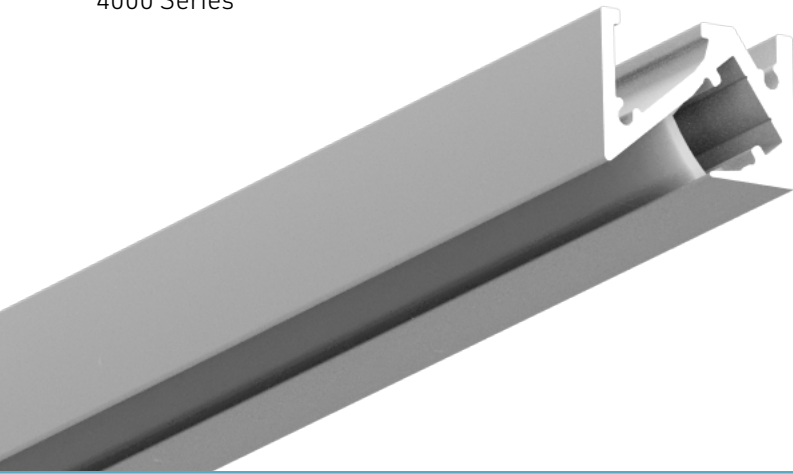

Cross-section dimensions:



THE ELEGANCE OF SIMPLICITY

A new compact profile has been added to this thin series! Profile 4250 provides accent lighting at an angle of 53° to highlight products on shelves or to cut out the underside of cabinets. Even better, the phantom brackets perfectly conceal the surface installation. Ideal for commercial or residential applications.

FEATURES

- Compact aluminum profile: 24.58 mm x 15.88 mm (0.97 in x 0.63 in)
- Custom lengths from 2 to 192 inches (4.88 m/16 ft) in aluminum, and 2 to 240 inches (6 m/20 ft) in black
- 53° lighting angle
- 4 lumen packages: LP0 (128 lm/1.5 W/ft), LP1 (160 lm/1.5 W/ft), LP2 (255 lm/3.0 W/ft) et LP3 (308 lm/4.5 W/ft) in 8 mm width with 5 mm tape guide
- 6 color temperatures (2400 K to 6200 K), CRI 90+
- End caps with milled hole on both sides for the feed wire
- Surface installation with phantom brackets
- Optional power supply unit with DC socket or hardwire connection
- Indoor use, IP22

OPTIONS




LED STRIP COMPATIBILITY

Compatible with LED strips up to **8 mm** wide.

LINEAR WEIGHT

0.25 lbs/ft, 0.37 kg/m (without lens)

RECESSED INSTALLATION IN 5/8" GROOVE

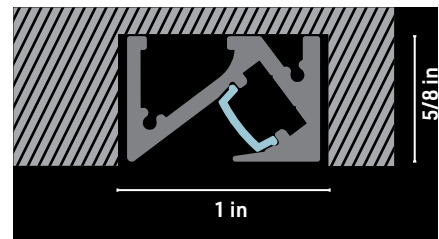






4250 Profile ordering sheet

4000 Series

PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 4250 - Profile, alu	 OP Opal lens	 PH - Phantom bracket	Custom length by sections of 2 to 240 inches (6m).
 4251 - Profile, black	 SIL Silicone lens available in continuous run of up to 10m (32ft 9.6in)	 NO - No mounting hardware	
 4252 - Profile, white	 NO - No lens		
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 53 - 5300K 62 - 6200K	LP0 - 119 LM / 1.5W FT / 90+CRI LP1 - 137 LM / 1.5W FT / 90+CRI LP2 - 234 LM / 3.0W FT / 90+CRI LP3 - 335 LM / 4.4W FT / 90+CRI	HW3 - Hardwire 3 FT HW6 - Hardwire 6 FT HW9 - Hardwire 9 FT HWX - Hardwire custom FT DC3 - DC plug 3 FT DC6 - DC plug 6 FT DC9 - DC plug 9 FT DCX - DC plug custom FT NO - No lead	I - IP22 indoor dry location	A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC E - Non-dimming DC plug in F - DMX G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC NO - No driver	*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors. ** Only available in 96W - 24V Driver TITLE 24
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN LEAD OUT	USAGE	POWER SUPPLY/CONTROL	