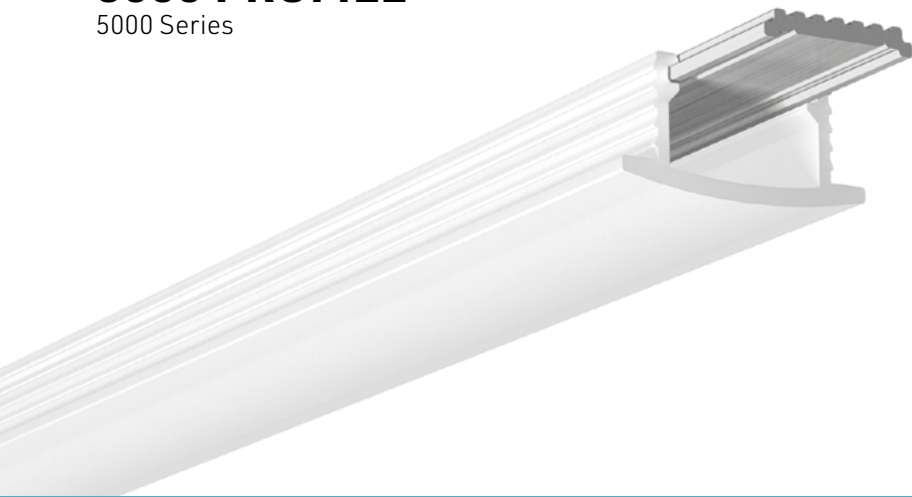
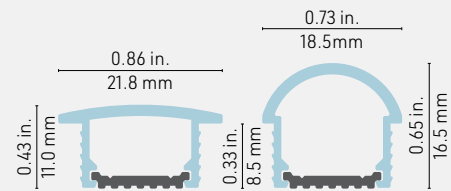


# 5000 PROFILE

5000 Series



## Cross-section dimensions:



## SIMPLICITY ITSELF!

The 5000 consists of an **Aluminum heat sink base** inserted into a **flexible recessed lens** with gripping sides. It allows for a very **simple installation**, with the assembly inserted into the recess and staying in place due to the gripping ribbed lens sides. The 5/8" wide and 3/8" deep recess is a direct fit for North American cabinetry, closet, or mural applications, besides being economical and providing lighting without hot spots\*.

### FEATURES

- Designed to give a uniform light without hot spots with the opal round lens\*.
- The 5200 (round) lens has a 0.31 inch (8mm) wall offset, while the 5300 (flanged) lens stands out only 1/10" (2.5mm).
- The LED heat sink base is made of aluminum for improved heat dissipation.
- The recess hole should be 5/8" (15.9mm) wide and 8.5mm (3/8 inch) deep minimum.
- Custom length by sections of 96 inches (2.44m).
- Application guide for 10mm (3/8 inch) LED engine or less.
- Designed to meet North American woodworking standards.

\*Dot free only in certain configurations - contact your sales representatives for information

### OPTIONS










### LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **10mm** wide.








### LINEAR WEIGHT

0.035 lbs/ft, 0.052 kg/m (without lens)



PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 5000 - 5000 Heat sink profile, alu	 OPF - Opal lens, flanged  OPR - Opal lens, round  NEW SIL - SiLens  NO - No lens	 3M - Mounting tape, double face  NO - No mounting hardware	Custom length by sections of 96 inches (2.44m).
<b>5000</b>			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH

## COLOR TEMPERATURE

	24 - 2400K
	27 - 2700K
	30 - 3000K
	35 - 3500K
	42 - 4200K
	53 - 5300K (LHP only)
	62 - 6200K (LP only)

	WD1 - 2200-2700K 14W
	WD3 - 2700-3500K 14W
	TW1 - Tunable White 11W
	TW2 - Tunable White 19W
	RGB1 - RGB 14W
	RGB2 - RGB 19W

## LUMEN PACKAGE\*

LP0 - 119 LM / 1.5W FT / 90+CRI
LP1 - 137 LM / 1.5W FT / 90+CRI
LP2 - 234 LM / 3.0W FT / 90+CRI
LP3 - 335 LM / 4.4W FT / 90+CRI
LP4 - 488 LM / 5.8W FT / 90+CRI
LHP - 668 LM / 7.0W FT / 95+CRI

Lumen Package selection is not available for **WD**, **TW** and **RGB** color options.

## LEAD IN/OUT

HW3 - Hardwire 3 FT
HW6 - Hardwire 6 FT
HW9 - Hardwire 9 FT
HWX - Hardwire custom FT
DC3 - DC plug 3 FT
DC6 - DC plug 6 FT
DC9 - DC plug 9 FT
DCX - DC plug custom FT
NO - No lead

## USAGE

I - IP22 indoor dry location
O - IP68 wet/damp location (IP68 is not available for motion sensor option)

For **TW** or **RGB** strip options, select either  
**A** [Non-dimming] or  
**E** [Non-dimming DC plug] in power supply plus the  
**J** [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.

## POWER SUPPLY/CONTROL

A - Non-dimming
B - ELV dimming 120V AC
C - ELV dimming 120/277 VAC**
D - 0/10V dimming 120/277 VAC
E - Non-dimming DC plug in
F - DMX
G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W
I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC
J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC
K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC
NO - No driver

## \*NOTES

\*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors.

\*\* Only available in 96W - 24V Driver.

TITLE  
24

COLOR TEMPERATURE CCT

LUMEN PACKAGE

LEAD IN

LEAD OUT

USAGE

POWER SUPPLY/CONTROL