


# 5350 PROFILE

5000 Series



## Cross-section dimensions:

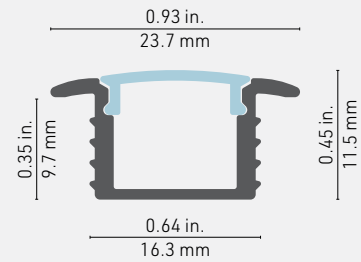

## A COMPACT RECESSED PROFILE

Here is a **compact recessed** profile allowing you to make the light source and the LED invisible. The edges on each side of this extrusion allow a recessed installation, giving it style with a discreet and neat appearance. This profile will **fit in a 5/8 inch** deep recess.

### FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens\*.
- Designed for a snug fit in a 5/8-inch (16mm) wide, 3/8-inch (10mm) deep recess.
- Custom length by sections of 96 inches (2.44m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

### OPTIONS



### LED ENGINE COMPATIBILITY




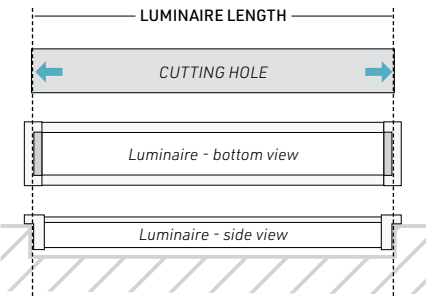






IP22: Compatible with LED engines up to **10mm** wide.

### LINEAR WEIGHT















0.110 lbs/ft, 0.164 kg/m (without lens)

\*Dot free only in certain configurations - contact your sales representatives for information




PROFILE	LENSES	MOUNTING HARDWARE	LENGTH
 <b>5350</b> - 5350 Profile, alu	 <b>OP</b> - Opal lens	 <b>3M</b> - Mounting tape, double face	Custom length by sections of 2 to 96 inches (2.44m).  *NOTE: Follow this diagram to calculate the correct length  
 <b>5351</b> - 5350 Profile, black	 <b>PR</b> - Prime lens	 <b>NO</b> - No mounting hardware	
 <b>5352</b> - 5350 Profile, white	 <b>NO</b> - No lens		
 <b>535X</b> - 5350 Profile, custom color IMPORTANT: Give RAL color No See Appendix 1 on page 262			
RAL NUMBER			
PROFILE	LENS	MOUNTING HARDWARE	LENGTH



5000

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none"> <li> <b>24</b> - 2400K</li> <li> <b>27</b> - 2700K</li> <li> <b>30</b> - 3000K</li> <li> <b>35</b> - 3500K</li> <li> <b>42</b> - 4200K</li> <li> <b>53</b> - 5300K (LHP only)</li> <li> <b>62</b> - 6200K (LP only)</li> <li> <b>WD1</b> - 2200-2700K 14W</li> <li> <b>WD3</b> - 2700-3500K 14W</li> <li> <b>TW1</b> - Tunable White 11W</li> <li> <b>TW2</b> - Tunable White 19W</li> <li> <b>RGB1</b> - RGB 14W</li> <li> <b>RGB2</b> - RGB 19W</li> </ul>	<ul style="list-style-type: none"> <li><b>LP0</b> - 128 LM / 1.5W FT / 90+CRI</li> <li><b>LP1</b> - 160 LM / 1.5W FT / 90+CRI</li> <li><b>LP2</b> - 255 LM / 3.0W FT / 90+CRI</li> <li><b>LP3</b> - 308 LM / 4.5W FT / 90+CRI</li> <li><b>LP4</b> - 400 LM / 5.8W FT / 90+CRI</li> <li><b>LHP</b> - 700 LM / 7.0W FT / 95+CRI</li> </ul> <p><b>Note:</b> Not applicable for Warmdim (WD), Tunable White (TW) &amp; RGB color temperatures</p>	<ul style="list-style-type: none"> <li><b>HW3</b> - Hardwire 3 FT</li> <li><b>HW6</b> - Hardwire 6 FT</li> <li><b>HW9</b> - Hardwire 9 FT</li> <li><b>HWX</b> - Hardwire custom FT</li> <li><b>NO</b> - No lead</li> </ul>	<ul style="list-style-type: none"> <li><b>I</b> - IP22 indoor dry location</li> </ul>	<ul style="list-style-type: none"> <li><b>A</b> - Non-dimming</li> <li><b>B</b> - ELV dimming 120V AC</li> <li><b>C</b> - ELV dimming 120/277 VAC**</li> <li><b>D</b> - 0/10V dimming 120/277 VAC</li> <li><b>E</b> - Non-dimming DC plug in</li> <li><b>F</b> - DMX</li> <li><b>G</b> - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</li> <li><b>I</b> - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</li> <li><b>J</b> - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</li> <li><b>K</b> - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</li> <li><b>NO</b> - No driver</li> </ul>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver</p> 
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN    LEAD OUT	USAGE	POWER SUPPLY/CONTROL	

**Serie 5350 (5350)** LM22520

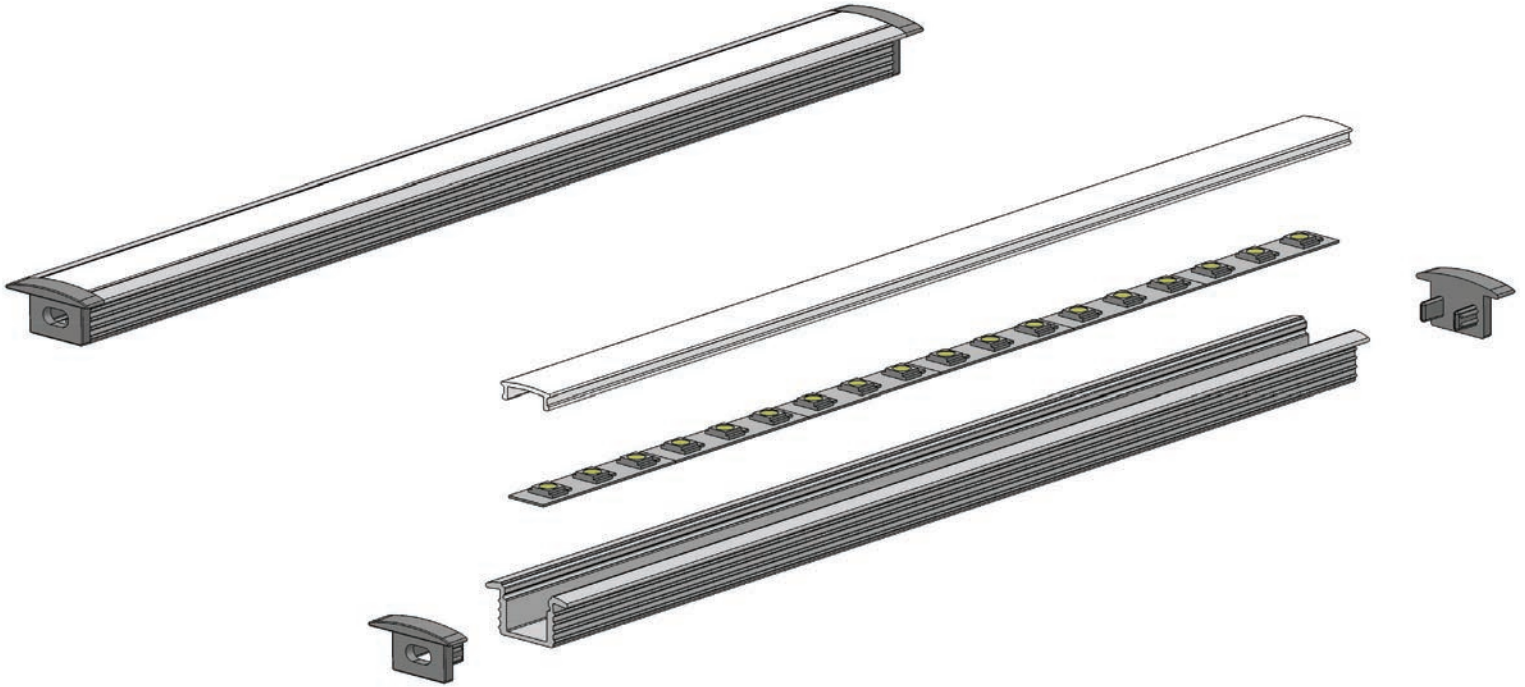

## ASSEMBLY DIMENSION / DIMENSION D'ASSEMBLAGE

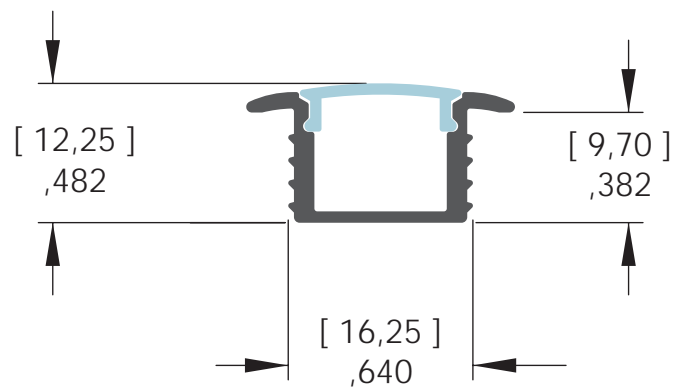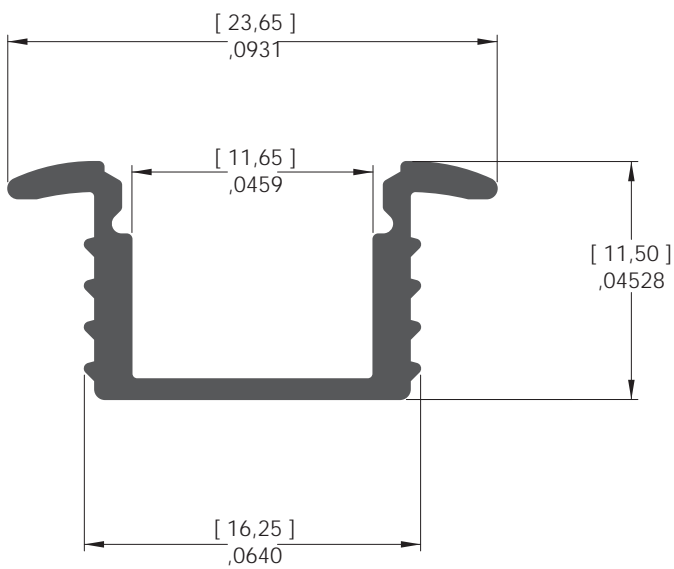

[ mm ]  
inches/pouces

# NOTES

