



7400 (7420) PROFILE

7000 Series

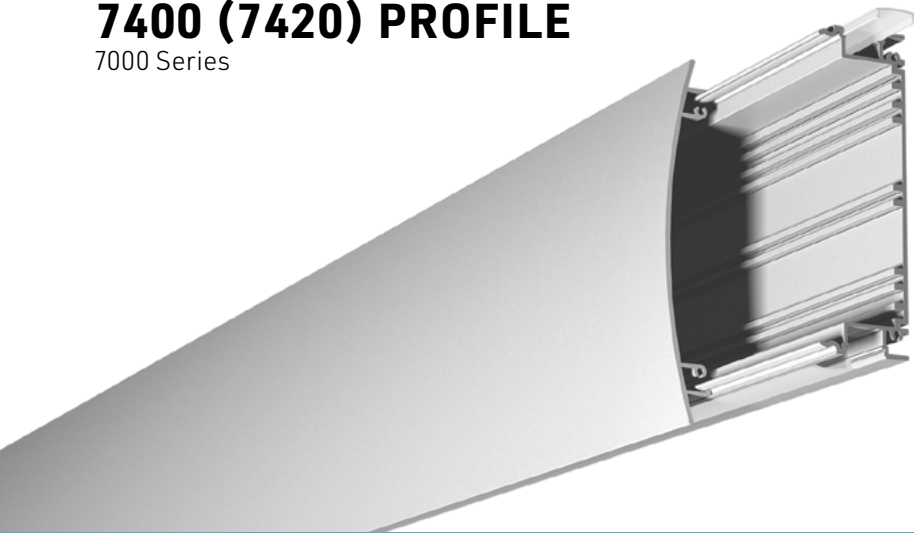

Cross-section dimensions:

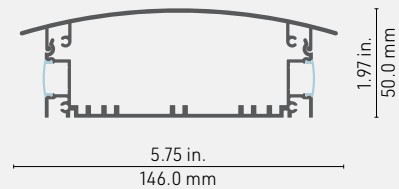

Make customized **modern wall fixtures** with our **7400 profile and the 7420 faceplate**. It accepts most LED engines and lenses of the 1000 Series, offering multiple lighting possibilities. Besides lighting the wall up and down, you could vary the light intensity and color.

FEATURES

- Compatible with 1000 Series lenses.
- Can be installed in 20 foot lengths.
- Custom length by sections of 6 to 240 inches (6m).
- Application guide for 10mm (3/8-inch) LED engine or less in top and bottom insert.
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

The top and bottom inserts are compatible with LED engines up to **14mm** wide for IP22 and up to **10mm** wide for IP68 options.
















LINEAR WEIGHT

1.617 lbs/ft, 2.406 kg/m (with cover plate)



7400 Profile ordering sheet

7000 Series

PROFILE	LENS DOWN	LENS UP	LENGTH
			Custom length by sections of 6 to 240 inches (6m).
7420 - Series 7400, alu	CL - Clear lens	CL - Clear lens	
			
	SP - Spread lens	SP - Spread lens	
			
	OX - Optiflex lens	OX - Optiflex lens	
			<p>*NOTES</p> <p>- By default CNC-machined junction box openings are made to match standard octagonal junction box in the center of the backplate of the aluminum profile. For custom options, please contact your local representative.</p> <p>- Drivers are remote</p>
	OP - Opal lens	OP - Opal lens	
			
	PR - Prime lens	PR - Prime lens	
			
	FO - Focus lens	FO - Focus lens	
			
	NO - No lens	NO - No lens	

7420	-	-	-
PROFILE	LENS DOWN	LENS UP	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL**	*NOTES
<div>24 - 2400K</div> <div>27 - 2700K</div> <div>30 - 3000K</div> <div>35 - 3500K</div> <div>42 - 4200K</div> <div>53 - 5300K (LHP only)</div> <div>62 - 6200K (LP only)</div>	<div>LP0 - 119 LM / 1.5W FT / 90+CRI</div> <div>LP1 - 137 LM / 1.5W FT / 90+CRI</div> <div>LP2 - 234 LM / 3.0W FT / 90+CRI</div> <div>LP3 - 335 LM / 4.4W FT / 90+CRI</div> <div>LP4 - 488 LM / 5.8W FT / 90+CRI</div> <div>LHP - 668 LM / 7.0W FT / 95+CRI</div>	<div>HW3 - Hardwire 3 FT</div> <div>HW6 - Hardwire 6 FT</div> <div>HW9 - Hardwire 9 FT</div> <div>HWX - Hardwire custom FT</div> <div>DC3 - DC plug 3 FT</div> <div>DC6 - DC plug 6 FT</div> <div>DC9 - DC plug 9 FT</div> <div>DCX - DC plug custom FT</div> <div>NO - No lead</div>	<div>I - IP22 indoor dry location</div> <div>O - IP68 wet/damp location (IP68 is not available for motion sensor option)</div>	<div>A - Non-dimming</div> <div>B - ELV dimming 120V AC</div> <div>C - ELV dimming 120/277 VAC***</div> <div>D - 0/10V dimming 120/277 VAC</div> <div>E - Non-dimming DC plug in</div> <div>F - DMX</div> <div>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</div> <div>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</div> <div>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</div> <div>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 100/277 VAC</div> <div>NO - No driver</div>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>***Only available in 96W - 24W Drive</p>
<div>WD1 - 2200-2700K 14W</div> <div>WD3 - 2700-3500K 14W</div> <div>TW1 - Tunable White 11W</div> <div>TW2 - Tunable White 19W</div> <div>RGB1 - RGB 14W</div> <div>RGB2 - RGB 19W</div> <div>RGBW2 - 3000K 4in1</div> <div>NO - No up light (opal lens)</div>	<p>Lumen Package selection is not available for WD, TW and RGB color options.</p>	<div>For TW or RGB strip options, select either</div> <div>A [Non-dimming] or</div> <div>E [Non-dimming DC plug] in power supply plus the</div> <div>J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</div>			