



7650 PROFILE (TUBE)

HORIZONTAL SUSPENSION

7000 Series

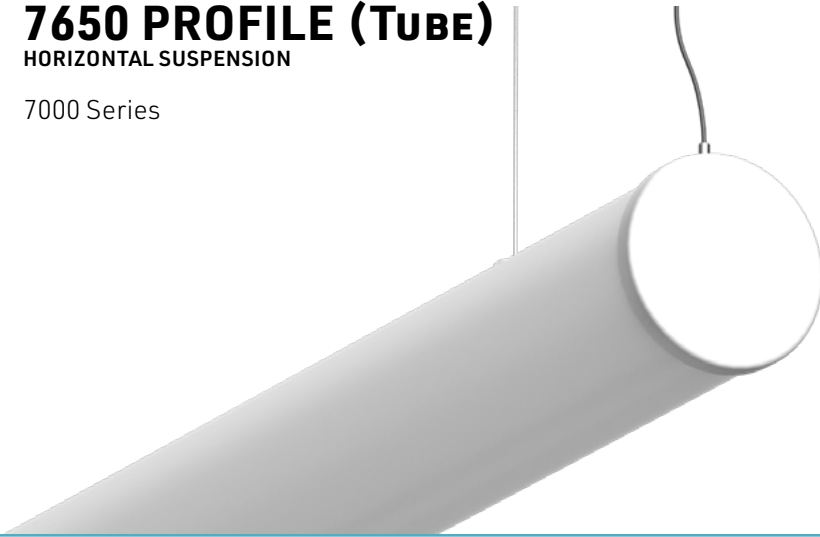

Cross-section dimensions:



A beautiful linear tubular suspended pendant luminaire is available with our 3-inch acrylic tubes. With the Edge heatsink, a custom suspend fixture is available in lengths up to 8 feet. The Edge heatsink preserves the life of LED chips and provides 315 degrees of illumination. A wide range of color temperatures and light outputs are available, allowing you to vary the intensity, and color of the light. The fixture is powered by a remote driver. The acrylic tube delivers a beautiful custom suspended pendant.

OPTIONS



LINEAR WEIGHT

0.529 lbs/ft, 0.787 kg/m (acrylic tube with Aluminum heat sink insert only)

FEATURES

- Custom length from 6 inches to 96 inches (2.44m)
- Edge heat sink lengthens the life of the LED
- Indoor usage for dry or damp location.
- Create striking lighting effects by varying angles or arranging tubes asymmetrically
- Acrylic lens for high-performance optics



ACRYLIC DIFFUSER



7650 - Acrylic diffuser tube luminaire, horizontal suspension

POWER CABLE FINISH

- BK** - Black
- WH** - White
- RD** - Red
- BC** - Black/White Chevron

CANOPY



Remote driver canopy plate
See Appendix 2 on page 260
CR0 - Alu
CR1 - Black
CR2 - White

LENGTH

Custom length:
LP1, LP2 **6" - 96"**
LP3, WD1, WD2 **6" - 60"**



Integrated driver in canopy
See Appendix 2 on page 260
CI0 - Alu
CI1 - Black
CI2 - White



Integrated driver & suspension kit
See Appendix 2 on page 260
CIK0 - Alu
CIK1 - Black
CIK2 - White



NO - No canopy

7650H			
ACRYLIC DIFFUSER	POWER CABLE FINISH	CANOPY	LENGTH

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none"> 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 62 - 6200K 	<ul style="list-style-type: none"> 3LP1 - 411 LM / 4.5W FT / 90+CRI 3LP2 - 702 LM / 9.0W FT / 90+CRI 3LP3 - 1035 LM / 13.2W FT / 90+CRI 	<p>HW15 - Hardwire 15 FT</p>	<ul style="list-style-type: none"> I - indoor dry location D - indoor damp location 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W NO - No power supply 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>**Only available in 96W - 24W power supply.</p>
<ul style="list-style-type: none"> WD1 - 2200-2700K 14W WD3 - 2700-3500K 14W 		HW15			
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN	USAGE	POWER SUPPLY/CONTROL	

