



7650 PROFILE (TUBE)

WALL MOUNT

7000 Series

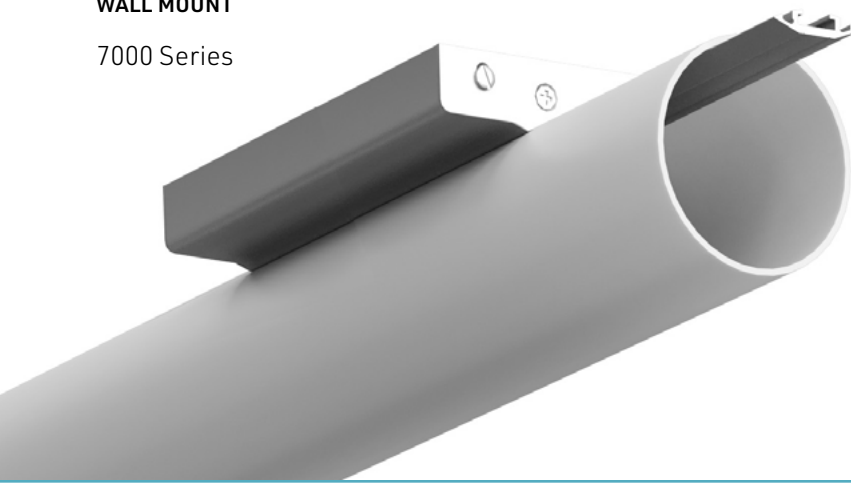

Cross-section dimensions:



A beautiful linear tubular round wall sconce is available with our 3-inch acrylic tubes. With the Edge heatsink, a custom wall-mounted fixture is available in lengths up to 5 feet. The Edge heatsink preserves the life of LED chips and provides 315 degrees of illumination. A wide range of color temperatures and light outputs are available, allowing you to vary the intensity, and color of the light. The fixture is wall mounted and is powered with a remote driver. The acrylic tube delivers a beautiful custom decorative luminaire.

OPTIONS



LINEAR WEIGHT

0.529 lbs/ft, 0.787 kg/m (acrylic tube with Aluminum heat sink insert only)

FEATURES

- Custom length from 9 inches to 60 inches (1.52m)
- Indoor usage and select dry or damp location
- Can be mounted horizontally or vertically
- Three position options for the mounting bracket
- Acrylic lens for high-performance optics
- Operated with a remote driver





LENGTH

Custom length 9" - 60"

NOTE:
This mural canopy requires a remote driver.
To request custom position of the canopy, please contact your representative

7650W	-	-
LUMINAIRE	MURAL CANOPY POSITION	LENGTH

7000

COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN	USAGE	POWER SUPPLY/CONTROL	*NOTES
<ul style="list-style-type: none"> 24 - 2400K 27 - 2700K 30 - 3000K 35 - 3500K 42 - 4200K 62 - 6200K 	<ul style="list-style-type: none"> 3LP1 - 411 LM / 4.5W FT / 90+CRI 3LP2 - 702 LM / 9.0W FT / 90+CRI 3LP3 - 1035 LM / 13.2W FT / 90+CRI 	<p>HW1 - Hardwire 1 FT</p>	<ul style="list-style-type: none"> I - indoor dry location D - indoor damp location 	<ul style="list-style-type: none"> A - Non-dimming B - ELV dimming 120V AC C - ELV dimming 120/277 VAC** D - 0/10V dimming 120/277 VAC G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W NO - No power supply 	<p>*The light output is provided in lumens per foot, for a CCT of 4200K without lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>**Only available in 96W - 24W power supply.</p>
<ul style="list-style-type: none"> WD1 - 2200-2700K 14W WD3 - 2700-3500K 14W 		<p>HW1</p>			<p>TITLE 24 COMPLIANT</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN	USAGE	POWER SUPPLY/CONTROL	