


8800 PROFILE - LUXLINE 120V

8000 Series



Cross-section dimensions:

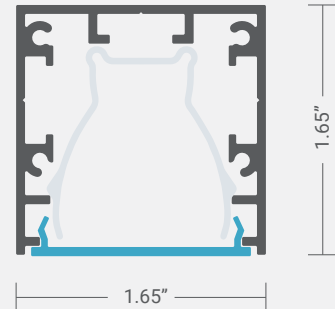

The 8800 Luxline is an aluminum channel designed for long and bold linear lines of light. It is integrated with our energy-efficient Luxline 120-volt LED technology for a custom linear lighting solution. The 8800 Luxline can be suspended, surface mounted, or recessed, permitting a vast number of applications. Attain a refined look without any pixelation that will harmonize perfectly in any space when seeking long linear runs of light.

FEATURES

- Made of ALCOA 6063-T5 aluminum alloy for increased heat dissipation
- Minimum length of 2ft (24") with increments of 4" up to 164ft (1968")
- Ships in increments up to 8 ft (96"). Lengths up to 16 ft available upon special request
- Joiner system available to link multiple 8800 series profile sections
- No driver needed: 120V LuxLine LED light source
- The HER reflector holds the LED in place while enhancing performance
- 5 color temperatures (2400 K to 4000 K)
- Designed to give a uniform light without hot spots with the prime or opal or black lens
- Indoor use

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with our LuxLine series of 120V LED engine tape.

WEIGHT

0.563 lbs/ft, 0.8378 kg/m, without lenses.

LUXLINE

TIRED OF YOUR LED DRIVERS?


No drivers required up to 164 ft.

YOUR SOLUTION TO LONG LED RUN

36 ft
48 ft
60 ft
72 ft
84 ft





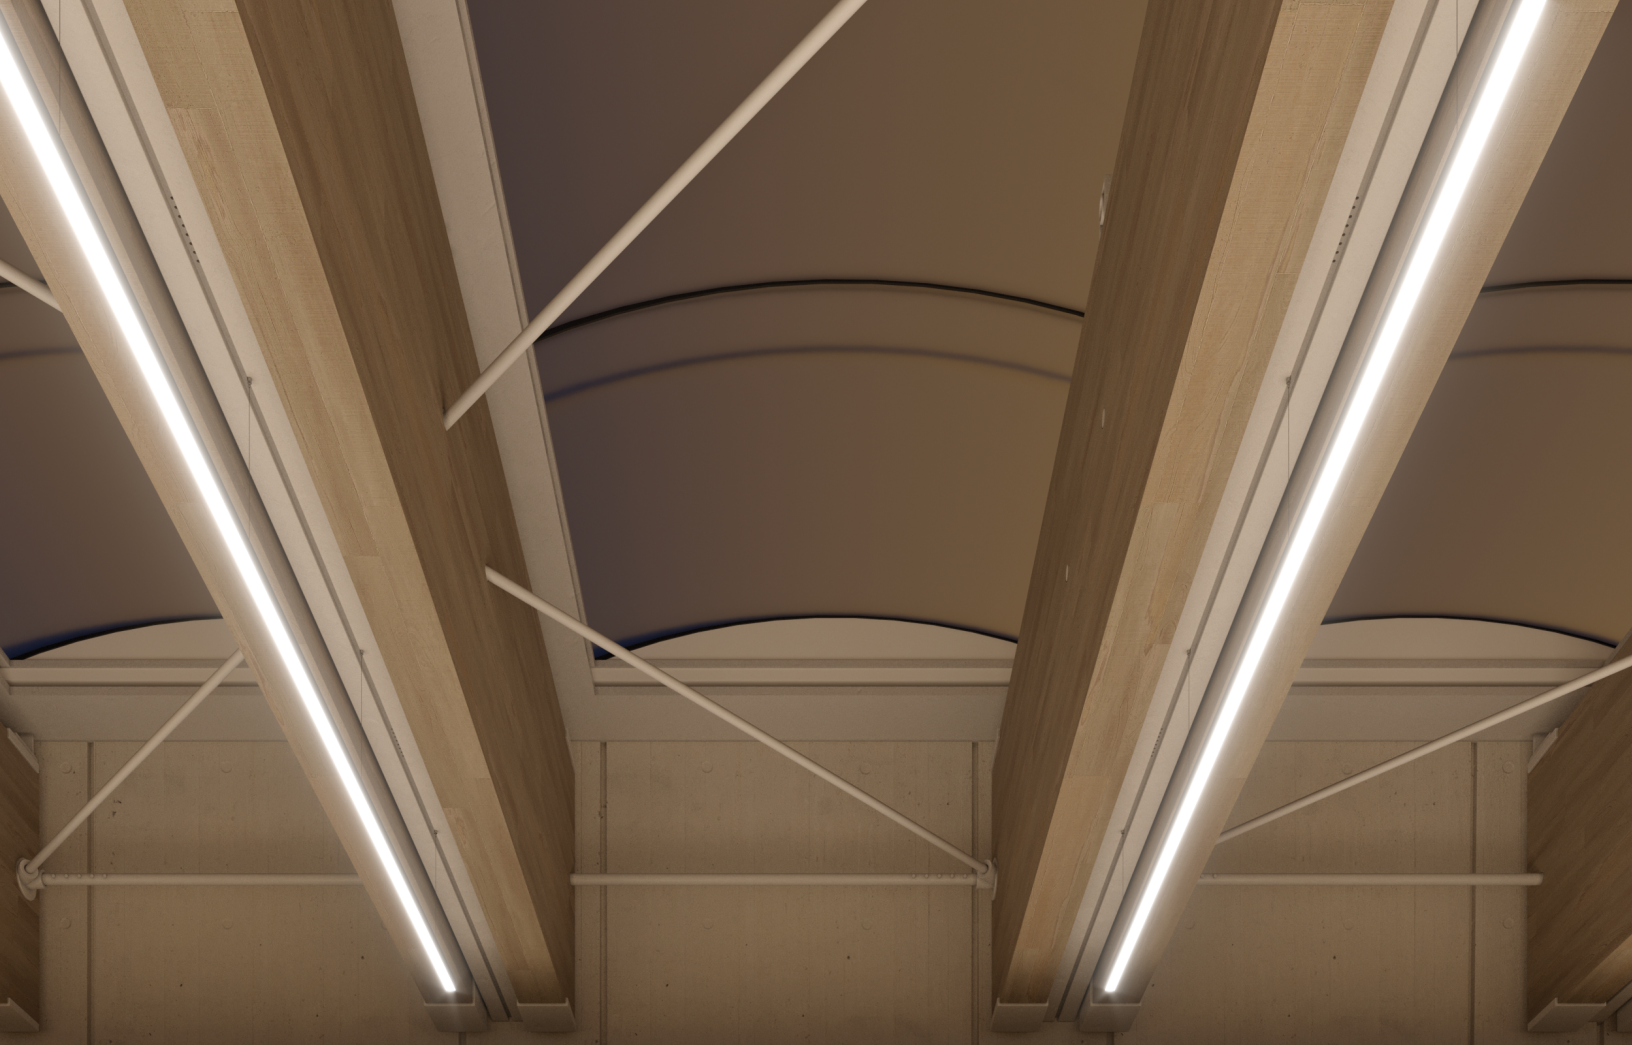













509 510










8800 LuxLine Profile ordering sheet

8000 Series

PROFILE	LENSES	MOUNTING HARDWARE	SUSPENSION / RECESS	OPTION	LENGTH
 <p>8800 - Profile, Alu</p>  <p>8801 - Profile, Black</p>  <p>880X - Profile, Custom color IMPORTANT: Give RAL color No See Appendix 1 on page 256</p>	 <p>PR - Prime flat lens</p>  <p>OP - Opal flat lens</p>  <p>BK - Black lens</p> <p> NO - No Lenses</p>	<p>S - Surface mount</p> <p>Note: Mounting hardware by others</p>  <p>HDSW - Swivel bracket kit</p>  <p>Type B dbL. chann. susp. kit with 15ft. aircraft cable SUS - 8800 suspension kit</p> <p> NO - No mounting hardware</p>	<p>OB - Cover for octagonal outlet box</p>  <p>OC - Cover for rectangular outlet box</p> <p>NOTE: Canopies only available with SUS bracket (suspension)</p>  <p>Canopy plate See Appendix 2 on page 256 CR0 - Alu CR1 - Black CR2 - White</p>  <p>G8800-1/2 Gypsum groove 1/2", 4'</p>  <p>G8800-5/8 Gypsum groove 5/8", 4'</p> <p>QUANTITY</p> <p> NO - No canopy / groove</p>	 <p>HER - High efficiency reflector, single channel - 1 LED engine</p>	<p>Custom length by sections of 2 to 240"</p> <p>Maximum length using Loop Swivel Brackets = 72"</p>
<p>RAL NUMBER</p>  <p>JS - Type B straight joiner</p> <p>QUANTITY</p>  <p>BJH90 - Type B 90° joiner</p> <p>QUANTITY</p>					

8000

PROFILE	LENS	MOUNTING HARDWARE	CANOPY / GROOVE	OPTION	LENGTH
<p>COLOR TEMPERATURE</p>  24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  40 - 4000K	<p>LUMEN PACKAGE*</p> <p>LUX - 330 LM / 4.0W FT / 90+CRI</p> <p>LUX</p>	<p>LEAD IN</p> <p>PG3 - Plug-in 36" PG6 - Plug-in 72" PGX - Plug-in custom (up to 102") HW3 - Hardwire 36" HW6 - Hardwire 72" HW9 - Hardwire 108" HWX - Hardwire custom</p> <p>LEAD IN</p>	<p>WIRE POSITION</p> <p>B5BC - Backfeed / 5" blind covers</p> <p>B5BC</p>	<p>USAGE</p> <p>2 - IP64 indoor</p> <p>IP64</p>	<p>NOTES</p> <p>* The light output is provided in lumens per foot, for a CCT of 4000K and no lens.</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	LEAD IN	WIREWAY & BLIND COVER	IP RATING	

