


9400 PROFILE

9000 Series



Cross-section dimensions:



The **9400 profile** with its twin mounting channels allows for a **wide range of installation options**. Whether on swivel arms, on a surface, or suspended, it can be built in complex spatial configurations using **corner joiners**. Its rugged build in 6063-T5 aluminum alloy will withstand abuse in demanding applications and extreme weather, all of it with an understated elegance.

FEATURES

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heat sink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has 3 application guides for 10mm (3/8-inch) wide LED engines.
- Designed to give a uniform light without hot spots.
- Its mounting channels make it compatible with a wide range of installation accessories.

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines and PCBs up to **33mm** wide.

LINEAR WEIGHT

0.697 lbs/ft, 1.038 kg/m (without lens or insert)



CORNER ASSEMBLY OPTIONS




ADDITIONAL COMMENTS

When ordering an assembly that requires corners, make sure to indicate the correct corner type. In order to do this, please specify the desired lighting layout using the form below.




DOWN LIGHT

SIDE EXTERIOR




SIDE INTERIOR

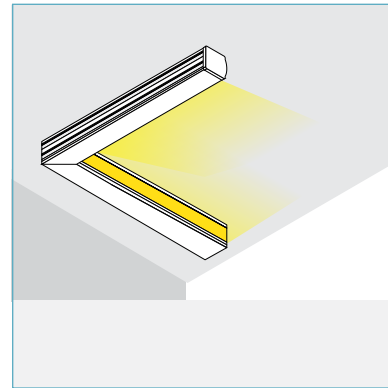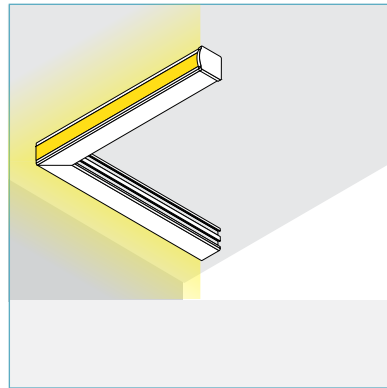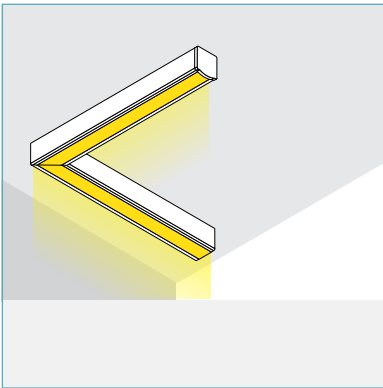

L-SHAPE

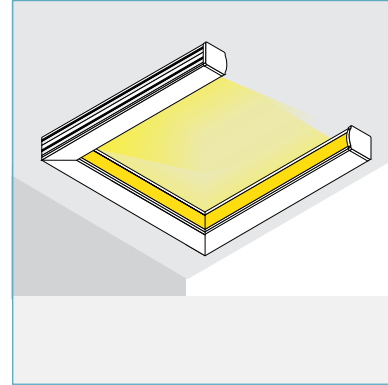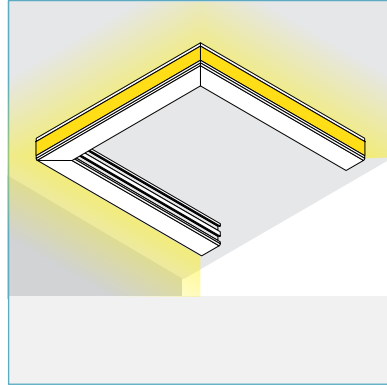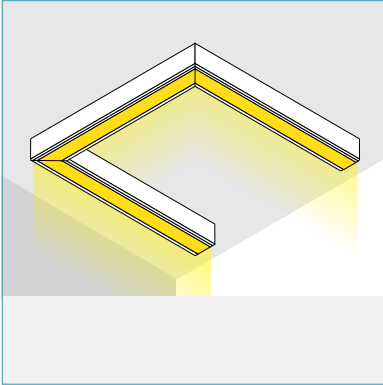

U-SHAPE

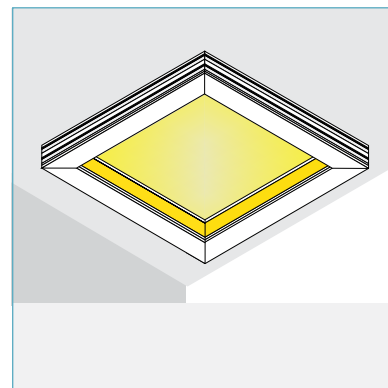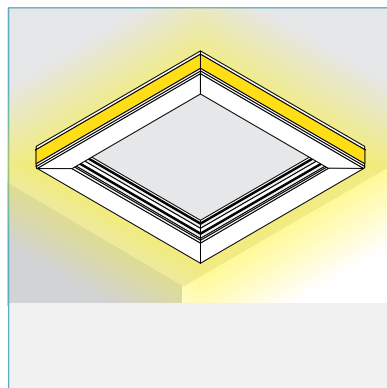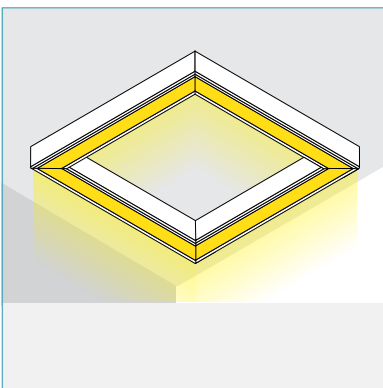





























RECTANGLE

















9400 Profile ordering sheet

9000 Series

PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH	ACCESSORIES
 <p>9400 - Profile, Alu</p>  <p>9401 - Profile, Black</p>  <p>9402 - Profile, White</p>  <p>940X - 9400 Profile, custom color</p> <p>IMPORTANT: Give RAL color NoSeeAppendix1 on page 258</p> <p>RAL NUMBER</p>	 <p>CL - Clear lens</p>  <p>OX - Optiflex lens</p>  <p>OP - Opal Lens</p>  <p>PR - Prime Lens</p>  <p>BK - Black Lens</p>  <p>FO - Focus lens</p> <p>NO - No lens</p>	 <p>Surface 2-side bracket S20 - Alu S21 - Black S22 - White</p>  <p>Surface 1-side bracket S10 - Alu S11 - Black S12 - White</p>  <p>Surface 90-deg. bracket S30 - Alu S31 - Black S32 - White</p>  <p>Swivel wall bracket SW0 - Alu SW1 - Black SW2 - White</p>  <p>Swivel sign arm, 6" offset SA60 - Alu SA61 - Black SA62 - White</p>  <p>Swivel sign arm, 18" offset SA180 - Alu SA181 - Black SA182 - White</p>  <p>Type B dbl. chann. susp. kit with 15ft. aircraft cable SUS0 - Alu SUS1 - Black SUS2 - White</p> <p>NO - No mounting hardware</p>	<p>NOTE: Only available with SUS bracket (suspension)</p>  <p>Remote driver canopy plate See Appendix 2 on page 258 CR0 - Alu CR1 - Black CR2 - White</p>  <p>Integrated driver in canopy See Appendix 2 on page 258 C10 - Alu C11 - Black C12 - White</p>  <p>Integrated driver & suspension kit See Appendix 2 on page 258 CIK0 - Alu CIK1 - Black CIK2 - White</p> <p>NO - No canopy</p>	 <p>HER - High efficiency reflector</p> <p>NO - No option</p>	<p>Custom length by sections 6 to 240 inches (6m).</p>	<p>CORNERS</p> <p>NOTE: Joiners for corner installation must be ordered separately.</p>  <p>9400 corner 90°, 6x6"</p> <p>CH900 - Alu</p> <p>CH901 - Black</p> <p>CH902 - White</p> <p>QTY</p>  <p>9400 cross 135°, 6x6"</p> <p>CH1350 - Alu</p> <p>QTY</p>  <p>9400 cross corner, 6x6x6"</p> <p>CHCR0 - Alu</p> <p>QTY</p> <p>NOTE: This accessory is a custom order only. Shipping time is 3 weeks +</p> <p>JOINERS (TYPE B)</p>  <p>JS - Straight joiner</p> <p>QTY</p>  <p>JH90 - Horizontal joiner, 90°</p> <p>QTY</p>  <p>JH45 - Horizontal joiner, 45°</p> <p>QTY</p>  <p>JV90 - Vertical joiner, 90°</p> <p>QTY</p>

9000

PROFILE	LENS	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH	
COLOR TEMPERATURE	LUMEN PACKAGE*	LEAD IN/OUT	USAGE	POWER SUPPLY/CONTROL	*NOTES	
 24 - 2400K  27 - 2700K  30 - 3000K  35 - 3500K  42 - 4200K  53 - 5300K (LHP only)  62 - 6200K (LP only)	<p>LP0 - 119 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 137 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 234 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 335 LM / 4.4W FT / 90+CRI</p> <p>LP4 - 488 LM / 5.8W FT / 90+CRI</p> <p>LHP - 668 LM / 7.0W FT / 95+CRI</p>	<p>HW3 - Hardwire 3 FT</p> <p>HW6 - Hardwire 6 FT</p> <p>HW9 - Hardwire 9 FT</p> <p>HWX - Hardwire custom FT</p> <p>DC3 - DC plug 3 FT</p> <p>DC6 - DC plug 6 FT</p> <p>DC9 - DC plug 9 FT</p> <p>DCX - DC plug custom FT</p> <p>SUS - Coaxial wire 15 FT</p> <p>NO - No lead</p>	<p>I - IP22 indoor dry location</p> <p>O - IP68 wet/damp location (IP68 is not available for motion sensor option)</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277 VAC**</p> <p>D - 0/10V dimming 120/277 VAC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p>NO - No driver</p>	<p>*The light output is provided in lumens per foot, for a CCT of 4200K and without lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** Only available in 96W - 24V Driver.</p>	<p>For TW or RGB strip options, select either</p> <p>A [Non-dimming] or E [Non-dimming DC plug] in power supply plus the J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</p>
 WD1 - 2200-2700K 14W  WD3 - 2700-3500K 14W  TW1 - Tunable White 11W  TW2 - Tunable White 19W  RGB1 - RGB 14W  RGB2 - RGB 19W  RGBW2 - 3000K 4in1	<p>Lumen Package selection is not available for WD, TW and RGB color options.</p>					

SINGLE-STRIP1 DOUBLE-STRIP2*

SINGLE STRIP DOUBLE STRIP

LEAD IN LEAD OUT

USAGE

POWER SUPPLY/CONTROL