


# OMEGA

## 4" Recessed Downlight




### Trims dimensions:


#### RA2 - SA2




#### RS2



#### RR2



#### KT0 - KT1 - KT2



The quality of light of this Series is comparable to that of a halogen lamp offering crisp, directional light which perfectly highlights surroundings. It offers a CRI of 90 and glare-control reflector design.

This small LED module provides higher lumen performance than an LED lamp and is very easy to install. Without the need of a housing, it is installed directly in the ceiling using torsion springs and most models are IC rated. The LED module is fitted with an external dimmable driver. Omega is also offering style, discretion and flexibility with a wide selection of interchangeable trims and accessories.

### FEATURES

- Anti-glare reflector design UGR  $\leq 19$
- Available in 6 W (IC rated) and 9W with three different beam angle options: 22°, 36° and 60°
- Reproduces the crisp white light of an MR16 halogen lamp
- 50 000 hours lifespan
- High CRI of 90
- Discreet look and sleek design
- Dimmable
- For installation in dry locations only. **RS2** (Round shower) is the only trim that can be used in both dry and damp locations.






## OMEGA TRIMLESS KIT - MODERN & STUNNING

### AN INSTANT CLASSIC

The Omega trimless kit is our new favorite LED Recessed luminaire! Minimalist with the newest in technology. The kit is available in silver, white or black. One of the advantages is that it is designed to be plastered into ceilings to give a seamless appearance. A great choice to get a clean and modern look.



**Kit Trimless Black**

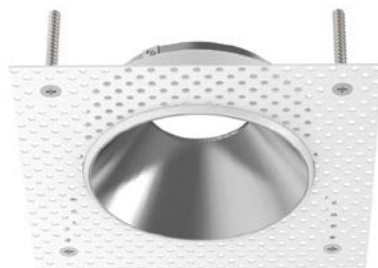

**Kit Trimless Silver**



**Kit Trimless White**



### QUALITY CONSTRUCTION

The Omega Series is designed and manufactured using high quality materials.

### EASE OF INSTALLATION

This LED downlight is easy to install with no need for a housing and it comes equipped with torsion springs.

### VERSATILITY

With interchangeable trims and reflectors, this product can be adapted to all types of designs and applications.


### PLEASING LIGHT

The Omega Series reproduces the crisp white look of a halogen MR16 lamp at a fraction of the energy cost

### SUPERIOR PERFORMANCE











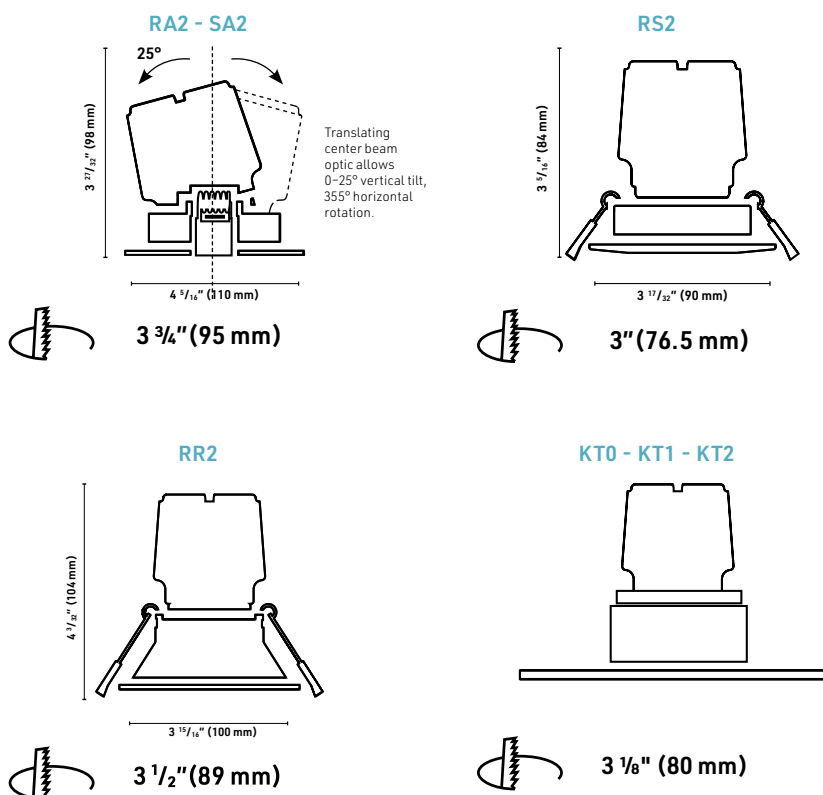














The Omega Series produces more light output than a regular LED MR16 or GU10 lamp.

### OMEGA MODULES AND TRIMS DIMENSIONS



# Omega ordering sheet

## Recessed downlight

| TRIM  | LUMINOSITY  | COLOR TEMPERATURE  | BEAM ANGLE  | POWER SUPPLY  | ACCESSORIES   | QUANTITY  |
|---|---|--|---|---|---|---|
| <br><b>KT0</b> - Kit trimless silver<br> 3 1/8" (80 mm)         | <b>670</b> - 670 lm (6W) CRI 90+<br><b>900</b> - 900 lm (9W)* CRI 90+           |  27 - 2700K<br> 30 - 3000K<br> 35 - 3500K<br> 40 - 4000K** |  22 - 22 degrees<br> 36 - 36 degrees<br> 60 - 60 degrees | <b>B</b> - ELV dimming 120V AC<br><b>D</b> - 0-10V dimming 120/277V AC            | <br><b>PF</b> - Plaster frame, new construction<br><br><br><b>IC</b> - IC Box, new construction (Use only with 900 lm 9W)<br><br><br><b>NO</b> - No mounting accessories | <br><b>OMEGA</b> |
| <br><b>KT1</b> - Kit trimless black<br> 3 1/8" (80 mm)          | <i>*900 lm 9W is not IC rated. May require insulated box (see accessories).</i> | <i>**4000K option is available on special order. Delivery times will be longer.</i>  |   | <i>***0-10V dimming option for 670lm (6W) is available on special order only.</i> |   |   |
| <br><b>KT2</b> - Kit trimless white<br> 3 1/8" (80 mm)          |   |  |   |   |   |   |
| <br><b>RA2</b> - Round adjustable white<br> 3 1/8" (95 mm)     |   |  |   |   |   |   |
| <br><b>SA2</b> - Square adjustable white<br> 3 1/8" (95 mm) |   |  |   |   |   |   |
| <br><b>RR2</b> - Round recessed white<br> 3 1/2" (89 mm)    |   |  |   |   |   |   |
| <br><b>RS2</b> - Round shower white<br> 3" (76.5 mm)        |   |  |   |   |   |   |
| TRIM  | LUMINOSITY  | COLOR TEMPERATURE  | BEAM ANGLE  | POWER SUPPLY  | ACCESSORIES   | QUANTITY  |