



# SERZO 2.0

Luminaire Series

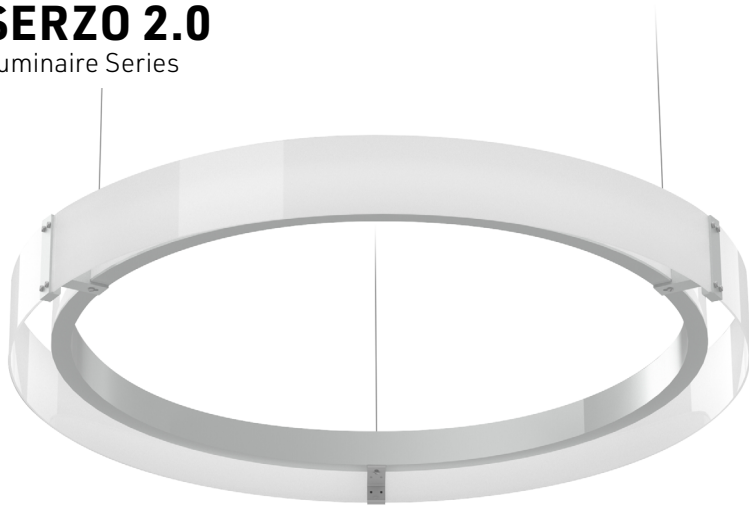

## Cross-section dimensions:

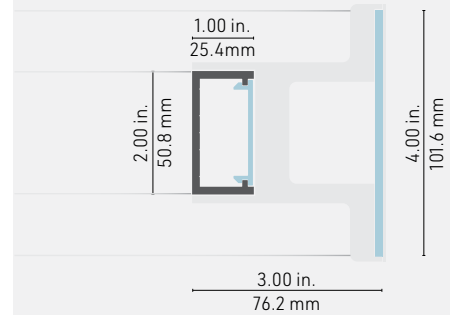

Introducing the impressive SERZO ring luminaire system, an exclusive series at LumenTruss™. The Serzo can be suspended horizontally in different angles to create a spectacular visual effect. Available in three fixed diameters of 36, 54 and 72 inches<sup>1</sup>, they provide 360 degrees, even, dot-free omnidirectional lighting, making them particularly attractive for large spaces. The design of each ring incorporates an offset acrylic opal diffuser that gives this exceptional luminaire an elegant and refined look.

(1) Overall diameter with offset acrylic diffusers.

## FEATURES

- Anodized aluminum, white, black, or custom finishing.
- 180 LED/m light source with single or double installation for high power.
- Overall diameter of 36, 54 and 72 inches.
- Made of ALCOA 6063-T5 aluminum alloy that increases heat dissipation.

## OPTIONS



## LED ENGINE COMPATIBILITY

The LED channel is compatible with multiple LED engines, up to **36mm (1.42")** wide in total.

## WEIGHT

Serzo36: 1.288 lbs (2.232 kg)  
Serzo54: 7.6064 lbs (3.450 kg)  
Serzo72: 10.291 lbs (4.668 kg)

The weight varies significantly depending on product configuration. Figures provided are for the LED profiles only without lenses, mounting hardware, diffusers or reflectors.






















# SERZO 2.0 ordering sheet

## Luminaire Series

PROFILE	LENSES	SUSPENSION	OUTER RING	CANOPY
 <p>Serzo 36 - Profile, 32" O.D.  <b>S362</b> - White  <b>S361</b> - Black  <b>S36X</b> - Custom color</p> <p><b>IMPORTANT:</b> Give RAL color No            See Appendix 1 on page 158</p> <p>RAL NUMBER</p>  <p>Serzo 36 - Profile, 32" O.D.  <b>S362</b> - White  <b>S361</b> - Black  <b>S36X</b> - Custom color</p> <p><b>IMPORTANT:</b> Give RAL color No            See Appendix 1 on page 158</p> <p>RAL NUMBER</p>  <p>Serzo 36 - Profile, 32" O.D.  <b>S362</b> - White  <b>S361</b> - Black  <b>S36X</b> - Custom color</p> <p><b>IMPORTANT:</b> Give RAL color No            See Appendix 1 on page 158</p> <p>RAL NUMBER</p>	 <p><b>OX</b> - Serzo optiflex lens</p>	 <p>Horizontal suspension kit with            diffuser/reflector mount and 15ft.            aircraft cable  <b>SUS2</b> - White  <b>SUS1</b> - Black  <b>SUS3</b> - Graphite</p>	 <p><b>AC</b> - 4" Acrylic diffuser</p>	 <p><b>Remote driver canopy plate</b>            See Appendix 2 on page 260  <b>CR0</b> - Alu  <b>CR1</b> - Black  <b>CR2</b> - White</p> <p>  <b>NO</b> - No canopy</p>
PROFILE	<div>OX</div> <div>LEN</div>	SUSPENSION	<div>AC</div> <div>DIFFUSER/REFLECTOR</div>	CANOPY

COLOR TEMPERATURE	LUMEN PACKAGE*	USAGE	POWER SUPPLY/CONTROL**	*NOTES
 <b>24</b> - 2400K  <b>27</b> - 2700K  <b>30</b> - 3000K  <b>35</b> - 3500K  <b>42</b> - 4200K	<p>SERZO 36*<b>36L</b> - 3558 LM / 48W / 90+CRI  <b>36H</b> - 4234 LM / 71.78W / 90+CRI</p> <p>SERZO 54"  <b>54L</b> - 5574 LM / 75.3W / 90+CRI  <b>54H</b> - 6720 LM / 113.96W / 90+CRI</p> <p>SERZO 72"  <b>72L</b> - 7604 LM / 102.7W / 90+CRI  <b>72H</b> - 9164 LM / 155.4W / 90+CRI</p>	<p><b>I</b> - IP22 indoor dry location</p>	<p><b>A</b> - Non-dimming  <b>B</b> - ELV dimming 120V AC  <b>C</b> - ELV dimming 120/277 VAC***  <b>D</b> - 0/10V dimming 120/277 VAC  <b>E</b> - Non-dimming DC plug in  <b>F</b> - DMX  <b>G</b> - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W  <b>I</b> - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC  <b>J</b> - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC  <b>K</b> - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC  <b>NO</b> - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and a clear lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** 54H and 72H lumen packages require installation of two drivers.</p> <p>** Only available in 96W - 24V Driver</p>
COLOR TEMPERATURE CCT	LUMEN PACKAGE	<div>I</div> <div>USAGE</div>	POWER SUPPLY/CONTROL	