


SILO

Wood Series



Cross-section dimensions:

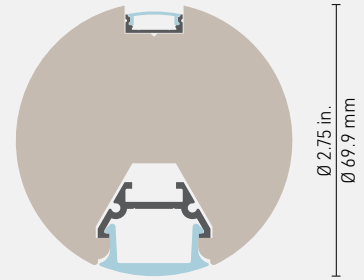

The **SILO** is another **minimalist profile** that is under 3 inches in diameter but brings all the **warmth and texture** that distinguishes our Wood Series. Its lightweight elegance is a welcome touch to contemporary spaces.

FEATURES

- Made from sustainably harvested and recycled pine hardwood.
- Custom length by sections of 12 to 144 inches (3.6m).
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to give a uniform light without hot spots with a Prime lens.
- Choose from direct or direct/ indirect lighting.
- Suspended pendant with remote or integrated in canopy driver.
- Available in an oil rubbed finish or natural finish.
- A natural finish permits client to select and apply their own stain to match the decor.
- Indoor use.
- Revit file available.

OPTIONS



LED ENGINE COMPATIBILITY

Direct (down):

Compatible with LED tapes up to **14mm** wide.

Indirect (up):

Compatible with LED tapes up to **14mm** wide.












LINEAR WEIGHT

1.419 lbs/ft, 2.112 kg/m (without lens or insert)



SIL0 ordering sheet

Wood Series

PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>SILV - Wood enclosure, varnished finish Aluminum heat sink included with profiles</p>	 <p>PR - Prime lens</p>	 <p>CL - Clear lens</p>  <p>PR - Prime lens</p>  <p>NO - No lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 260 CR0 - Alu CR1 - Black CR2 - White</p>  <p>Integrated driver in canopy See Appendix 2 on page 260 CI0 - Alu CI1 - Black CI2 - White</p>  <p>Integrated driver & suspension kit See Appendix 2 on page 260 CIK0 - Alu CIK1 - Black CIK2 - White</p>  <p>NO - No canopy</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>
 <p>SILN* - Wood enclosure, natural finish Aluminum heat sink included with profiles</p>					

PROFILE

PR

LENS DOWN

LENS UP

SUS

MOUNTING HARDWARE

CANOPY

LENGTH

Wood

COLOR TEMPERATURE	LUMEN PACKAGE*	USAGE	POWER SUPPLY/CONTROL	*NOTES
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p>	<p>LP0 - 119 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 137 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 234 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 335 LM / 4.4W FT / 90+CRI</p> <p>LP4 - 488 LM / 5.8W FT / 90+CRI</p> <p>LHP - 668 LM / 7.0W FT / 95+CRI</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277 VAC**</p> <p>D - 0/10V dimming 120/277 VAC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and without lens. Please refer to the optics page for CCT and translucency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96W - 24V Driver</p>
<p>WD1 - 2200-2700K 14W/m</p> <p>WD3 - 2700-3500K 14W/m</p> <p>COBWD - 2200-3200K 14W/m</p> <p>TW1 - Tunable White 11W/m</p> <p>TW2 - Tunable White 19W/m</p> <p>RGB1 - RGB 14W/m</p> <p>RGB2 - RGB 19W/m</p> <p>RGBW2 - 3000K 4in1 14W/m</p> <p>NO - No up light (opal lens)</p>	<p>Lumen Package selection is not available for WD, TW and RGB color options.</p>	<p>For TW or RGB strip options, select either A [Non-dimming] or E [Non-dimming DC plug] in power supply plus the J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</p>		

CCT DOWN

CCT UP

LM DOWN

LM UP

USAGE

I

POWER SUPPLY/CONTROL