


TAO

Wood Series



Cross-section dimensions:

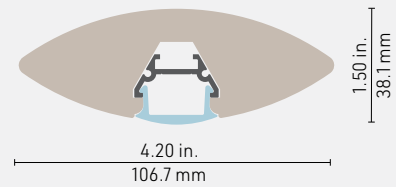

The **TAO** will hover seemingly **weightless in space**, with its organic blend of **futuristic form** and **timeless appeal** of wood. With a discreet visual signature from afar, it will unravel its texture in full from a more personal distance, all while casting light of a desired quality (and quantity).

FEATURES

- Made from sustainably harvested and recycled pine hardwood.
- Custom length by sections of 12 to 144 inches (3.6m).
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to give a uniform light without hot spots with a Prime lens.
- Suspended pendant with remote driver.
- A natural finish permits client to select and apply their own stain to match the decor.
- Indoor use.
- Revit file available.

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED tapes up to **14mm** wide.






LINEAR WEIGHT

1.024 lbs/ft, 1.524 kg/m (without lens or insert)



TAO ordering sheet

Wood Series

PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>TAON - Wood enclosure, natural finish Aluminum heat sink included with profiles</p>	 <p>PR - Prime lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 260 CR0 - Alu CR1 - Black CR2 - White</p> <p> NO - No canopy</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>

TAON	-	PR	-	SUS	-	
PROFILE		LENS		MOUNTING HARDWARE		LENGTH

Wood

COLOR TEMPERATURE	LUMEN PACKAGE*	USAGE	POWER SUPPLY/CONTROL	*NOTES	
<div><div></div>24 - 2400K</div> <div><div></div>27 - 2700K</div> <div><div></div>30 - 3000K</div> <div><div></div>35 - 3500K</div> <div><div></div>42 - 4200K</div> <div><div></div>53 - 5300K (LHP only)</div> <div><div></div>62 - 6200K (LP only)</div>	<div>LP0 - 119 LM / 1.5W FT / 90+CRI</div> <div>LP1 - 137 LM / 1.5W FT / 90+CRI</div> <div>LP2 - 234 LM / 3.0W FT / 90+CRI</div> <div>LP3 - 335 LM / 4.4W FT / 90+CRI</div> <div>LP4 - 488 LM / 5.8W FT / 90+CRI</div> <div>LHP - 668 LM / 7.0W FT / 95+CRI</div>	<div>I - IP22 indoor dry location</div>	<div>A - Non-dimming</div> <div>B - ELV dimming 120V AC</div> <div>C - ELV dimming 120/277 VAC**</div> <div>D - 0/10V dimming 120/277 VAC</div> <div>E - Non-dimming DC plug in</div> <div>F - DMX</div> <div>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</div> <div>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</div> <div>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</div> <div>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</div> <div>NO - No driver</div>	<div>* The light output is provided in lumens per foot, for a CCT of 4200K and without lens. Please refer to the optics page for CCT and translucency conversion factors.</div> <div>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</div> <div>*** Only available in 96W - 24V Driver</div>	
<div><div></div>WD1 - 2200-2700K 14W/m</div> <div><div></div>WD3 - 2700-3500K 14W/m</div> <div><div></div>COBWD - 2200-3200K 14W/m</div> <div><div></div>TW1 - Tunable White 11W/m</div> <div><div></div>TW2 - Tunable White 19W/m</div> <div><div></div>RGB1 - RGB 14W/m</div> <div><div></div>RGB2 - RGB 19W/m</div> <div><div></div>RGBW2 - 3000K 4in1 14W/m</div> <div><div></div>NO - No up light (opal lens)</div>	<div>Lumen Package selection is not available for WD, TW and RGB color options.</div>	<div>For TW or RGB strip options, select either</div> <div>A [Non-dimming] or</div> <div>E [Non-dimming DC plug] in power supply plus the</div> <div>J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</div>			
CCT DOWN	CCT UP	LM DOWN	LM UP	USAGE	POWER SUPPLY/CONTROL

TITLE

24

WATTAGE