


TOOBYFOR

Wood Series



Cross-section dimensions:



The **simplicity and minimalism** of **TOOBYFOR** makes it a welcome accent in contemporary spaces. Like the rest of our Wood Series, it is engineered from recycled hardwood, for natural warmth and superior quality. It is durable with its rugged build and an aircraft-grade suspension cable, but brings a lightweight and modern touch to any interior.

FEATURES

- Made from sustainably harvested and recycled pine hardwood.
- Custom length by sections of 12 to 144 inches (3.6m).
- The insert is made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Designed to give a uniform light without hot spots with a Prime lens.
- Choose from direct or direct/ indirect lighting.
- Suspended pendant with remote driver.
- A natural finish permits client to select and apply their own stain to match the decor.
- Indoor use.
- Revit file available.

OPTIONS



LED ENGINE COMPATIBILITY

Direct (down):


Compatible with LED tapes up to **14mm** wide.

Indirect (up):

Compatible with LED tapes up to **14mm** wide.






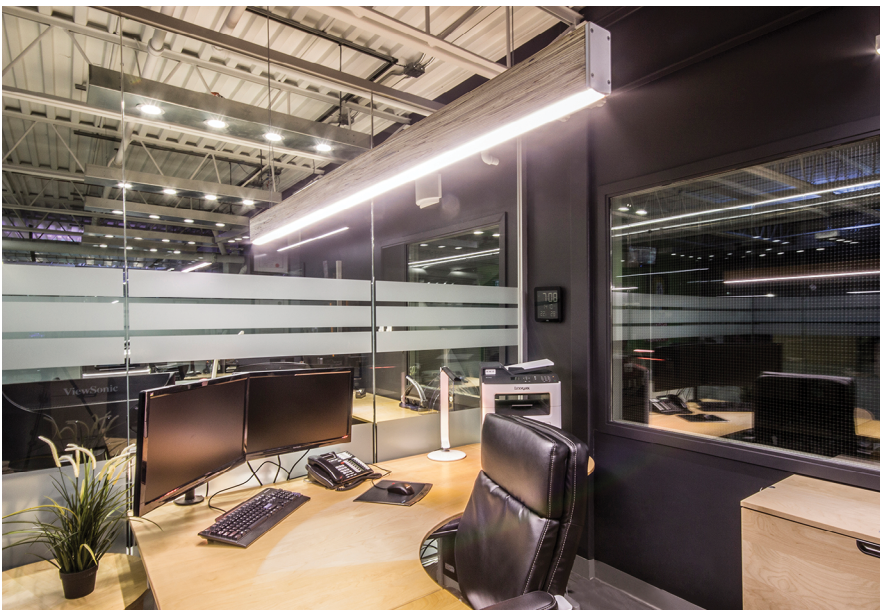


LINEAR WEIGHT

1.385 lbs/ft, 2.060 kg/m (without lens or insert)



TOOBYFOR ordering sheet

Wood Series

PROFILE	LENS DOWN	LENS UP	MOUNTING HARDWARE	CANOPY	LENGTH
 <p>TOON - Wood enclosure, natural finish Aluminum heat sink included with profiles</p>	 <p>PR - Prime lens</p>	 <p>CL - Clear lens</p>  <p>PR - Prime lens</p>  <p>NO - No lens</p>	 <p>SUS - Suspension kit with 15ft. aircraft cable</p>	 <p>Remote driver canopy plate See Appendix 2 on page 260 CR0 - Alu CR1 - Black CR2 - White</p>  <p>NO - No canopy</p>	<p>Custom length by sections of 12 to 144 inches (3.6m), in increments of 12 inches (30cm).</p> <p>By default suspension will be installed 6 inches (15.3cm) from the ends of the profile. For custom options please contact your local representative.</p>

TOON	-	PR	-	SUS	-	
PROFILE		LENS DOWN		MOUNTING HARDWARE		CANOPY
			LENS UP			LENGTH

Wood

COLOR TEMPERATURE	LUMEN PACKAGE*	USAGE	POWER SUPPLY/CONTROL	*NOTES
<p>24 - 2400K</p> <p>27 - 2700K</p> <p>30 - 3000K</p> <p>35 - 3500K</p> <p>42 - 4200K</p> <p>53 - 5300K (LHP only)</p> <p>62 - 6200K (LP only)</p>	<p>LP0 - 119 LM / 1.5W FT / 90+CRI</p> <p>LP1 - 137 LM / 1.5W FT / 90+CRI</p> <p>LP2 - 234 LM / 3.0W FT / 90+CRI</p> <p>LP3 - 335 LM / 4.4W FT / 90+CRI</p> <p>LP4 - 488 LM / 5.8W FT / 90+CRI</p> <p>LHP - 668 LM / 7.0W FT / 95+CRI</p>	<p>I - IP22 indoor dry location</p>	<p>A - Non-dimming</p> <p>B - ELV dimming 120V AC</p> <p>C - ELV dimming 120/277 VAC**</p> <p>D - 0/10V dimming 120/277 VAC</p> <p>E - Non-dimming DC plug in</p> <p>F - DMX</p> <p>G - Lutron - HI-LUME PREMIER 0,1% Eco System 24V/96W</p> <p>I - Casambi CBU-A2D-0/10V-DALI-Bluetooth 100/277 VAC</p> <p>J - Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC</p> <p>K - Casambi CBU-TED-CV-Trail edge dim-Bluetooth 120 VAC</p> <p>NO - No driver</p>	<p>* The light output is provided in lumens per foot, for a CCT of 4200K and without lens. Please refer to the optics page for CCT and transfluency conversion factors.</p> <p>** By default both Up & Down LED engines are controlled from one source. For custom options, please contact your local representative.</p> <p>*** Only available in 96W - 24V Driver</p>
<p>WD1 - 2200-2700K 14W/m</p> <p>WD3 - 2700-3500K 14W/m</p> <p>COBWD - 2200-3200K 14W/m</p> <p>TW1 - Tunable White 11W/m</p> <p>TW2 - Tunable White 19W/m</p> <p>RGB1 - RGB 14W/m</p> <p>RGB2 - RGB 19W/m</p> <p>RGBW2 - 3000K 4in1 14W/m</p> <p>NO - No up light (opal lens)</p>	<p>Lumen Package selection is not available for WD, TW and RGB color options.</p>	<p>For TW or RGB strip options, select either A [Non-dimming] or E [Non-dimming DC plug] in power supply plus the J [Casambi CBU-PWM4-4CH-Bluetooth 100/277 VAC] controller.</p>		
CCT DOWN	CCT UP	LM DOWN	LM UP	USAGE
				POWER SUPPLY/CONTROL